


## OPTIONS FOR WIRING BENCHES

### STORAGE UNIT FOR 2 GRIDS

#### Standard model

Vertical with upper and lower guide.  
Made for grids 660 x 534mm.  
For storing 2 grids.



Foresee an area of 330mm by GLS-2 to calculate the number of possible options by bench.



ref. GLS-2

#### Economical model

Compatible with grids of dimensions 580 x 750mm max. (tilted by 15 ° relative to the vertical). For storing 2 grids. Foresee an area of 380mm by RAILECO to calculate the number of possible options by bench.




ref. RAILECO

### REMOVABLE GRIDS



REF	PA6040	PA6050	PA7050
Height	555	660	750
Width	351	534	550

### 30mA RESIDUAL CURRENT CIRCUIT BREAKER

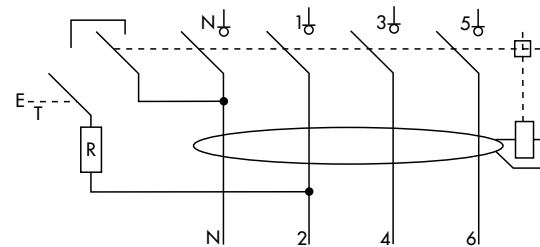

30mA residual current circuit-breaker. Single-phase bench.

ref. DIF30-2L A Type

ref. DIF30-2LAC AC Type

30mA residual current circuit-breaker. 3-phase bench.


ref. DIF30-4L A Type

ref. DIF30-4LAC AC Type

### CIRCUIT CONTINUITY TEST

An optional circuit "Continuity test" is available. This option allows to do some acoustic and visual tests under 24VAC.

ref. CAV



### 360° LED LAMP

#### REPLACE YOUR OLD LAMPS BY SOME NEW HARD-WEARING LED LAMPS

- LED lamp with ten electroluminescent LED diodes without maintenance.
- Bulb with a bayonet fitting (BA15D type), 2 contact terminals
- Available in 2 voltages:  
230VAC and 24VAC


#### COMPATIBLE WITH ALL THE BULBS WITH A BAYONET BA15D FITTING TYPE

ref. T15-230 230V

ref. T15-24 24V



### PNEUMATICS KIT FOR 4mm OUTPUT

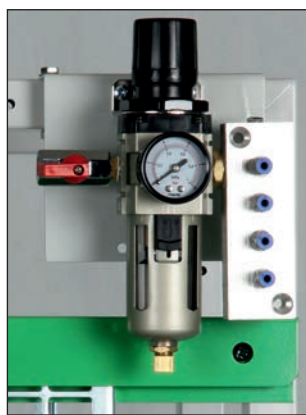

A pneumatic distribution can be fitted on the wiring benches. This option is delivered complete with air entry pipe, stop valve, regulator with filter and manometer, feeder tank with 4 quick-fit junctions, means of fixing and screws.

ref. DISLAB

### 24VDC - 2.2A OUTPUT



Electronic auto-protection.  
Safety terminals 4mm  
On/off switch  
LED indicator light.

ref. CC24L

## 360° LIGHT SIGNAL TOWERS



ref. VOY61



ref. VOY121



ref. VOY181

**WARNING: FORESE 1 TOWER BY STUDENT. THEY CAN BE SEEN THROUGH 360°.**  
CAN BE PLACED EITHER ON THE CONSOLE OR ON A VERTICAL CABLE RACEWAY.

COLOURS AVAILABLE UPON REQUEST

HARD WEARING LED LAMP

white - orange - red - green - blue



## VERTICAL CABLE RACEWAY

For the wiring of the power cable from the aerial wiring system to the top of upright supply console

ref. LABO-CANNE



## HANGING DRAWERS (300 SERIES) WITH LOCK AND KEY

For top in depth 750mm or 1000mm - Height: 400mm - Width: 450mm

REF	Drawer H=100mm	Drawer H=200mm	Drawer H=300mm
TIG-30	3	/	/
TIG-32	1	1	/
TIG-33	/	/	1



Réf. TIG-30



Réf. TIG-32

## HANGING DRAWERS (400 SERIES) WITH LOCK AND KEY

For top in depth 750mm or 1000mm - Height: 490mm - Width: 450mm

REF	Drawer H=100mm	Drawer H=200mm	Drawer H=300mm
TIG-40	4	/	/
TIG-41	2	1	/
TIG-42	/	2	/
TIG-43	1	/	1



Réf. TIG-41



Réf. TIG-42

## HANGING DRAWER WITH LOCK AND KEY

For top in depth 750mm or 1000mm  
Height: 100mm - Width: 400mm  
With lock & key

ref. TIG-10



## FAST INDUSTRIAL CONNECTIONS

These items are sold separately.

They allow the quick connection/disconnection of 24 contact points.  
The female base is fixed, the male connector is movable.



Female base easy to fix on a wiring grid, 24 contact points female + ground.

ref. HA-24S



Simple connector, without protection, 24 points male + ground.

ref. HA-M24

## BARE GRID FRAME HOLDER FOR GRIDS



This frame supports any type of grid up to 800 x 750mm.

It is equipped with a lower rail which is adjustable in steps and an upper rail which slides continuously on the vertical uprights.

The system is study to remove instantly the wired grids without moving the rails.

OVERALL DIMENSIONS:

Height: 1000mm,  
Width: 750mm,  
in square tubes of 30x30.  
Epoxy paint baked in an oven.

ref. ● CSO-10

ref. ● CSV-10