



TECHNICAL FURNITURE 2026




Quality of steel and paint

All parts of the metal frame are manufactured from electrogalvanised steel sheet, which is widely used in the car manufacturing industry and makes the sheet extremely resistant to corrosion. The iron/zinc combination forms a natural cell with moisture in the air that prevents the iron from corroding, even if shearing or scratching occurs. This protection is strengthened further by two layers of furnace-baked epoxy paint, which means that it is suitable for use even in tropical or coastal areas.

COLOR CHART

RAL 2008
RAL 6018
RAL 7016
RAL 7035

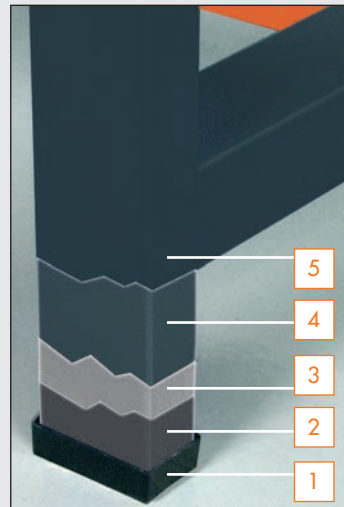


- 5 EPOXY PAINT LAYER 2
- 4 EPOXY PAINT LAYER 1
- 3 ELECTROGALVANIZED LAYER
- 2 UNOXYDISED STEEL
- 1 PVC BASE

Discover our new range with **mat anodized aluminium structure**. All the aluminium parts are available plain or painted. (See color chart)



Quality of top

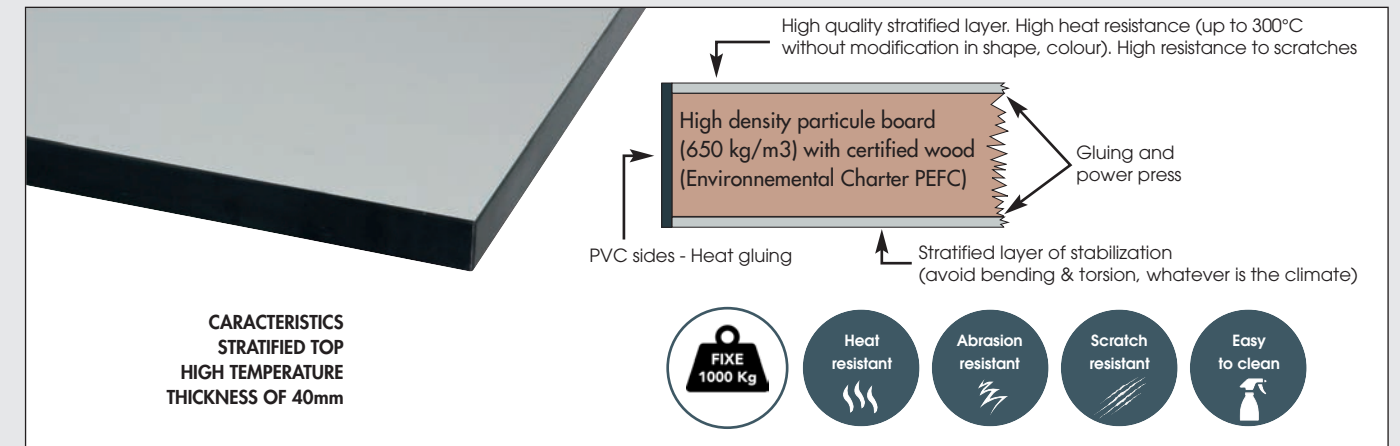


CHARACTERISTICS
STRATIFIED TOP
HIGH TEMPERATURE
THICKNESS OF 40mm



CHARACTERISTICS
WOOD TOP
THICKNESS OF 40mm




Quality of electrical components

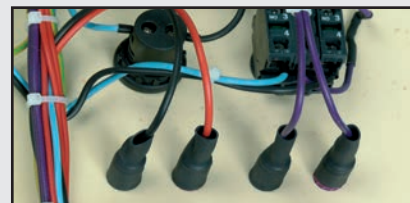


Rear section of insulated terminals (TT earthing system)

As the standard dictates, all the electrical connections of insulated mains output, for example DC, are completely sheathed to ensure the separation of circuits. (cf: CE, CEI1010, Decree 88-1056 and its updates, Order of 13/12/88 and NF-C15100).




Optimal contact with cable end sleeves

The cable end sleeves limit the risk of fire or electric shock undergoing maintenance.

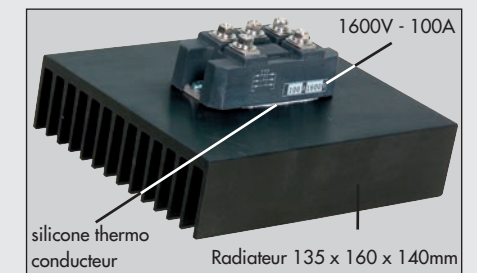

The diode bridges

The radiator: in black aluminium, largely oversized to avoid using a noisy fan. The bridge is screwed onto the radiator and a silicon heat conductor improves the heat diffusion.




Positive safety and activation

Following a network outage, the station will not automatically restart when the mains is restored. It will require an operator action. Manual restart required.



Resistant LED indicator lights

Cannot be removed by the student (the front cap cannot be unscrewed). No risk of accidental contact for the maintenance operator

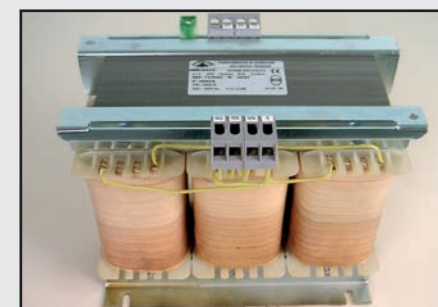

Safety transformers

All transformers comply with the standard NFEN61558. All DC outputs are isolated from the mains as stipulated in the standard. (cf: CE, CEI1010, Decree 88-1056 and its updates, NF-C15100)



Emergency Stop push-button (anti-vandalism type)

The crown of the Emergency Stop push-button can turn freely. As a result, the vandal cannot any more tear off the electrical connections by turning in strength the head of the Emergency Stop. The device stays in position on the front panel without any risk of damage.



Engraving in the part

The front face is engraved in the part. Symbols, icons, logos or customisations can be engraved on the front. The engraving in the part is impervious to abrasion and cannot be removed.



Earthing strip

All earth connections are individually wired on a standard strip. (cf: NF-C15100)

STANDARDS MULTI PURPOSE WORKSTATIONS



It is a single, fully-equipped electric-powered station which complies with current standards and is ready to be connected to the electric network. The start-up systems and connection terminals are installed on an electrotechnical console. There are many standard configurations, and these can be modified easily on simple application. All workbenches have a key-operated "EMERGENCY STOP" button for autonomous positive safety and an On/Off push-button with a lamp and "memory" function.

LOCKABLE COVER FOR CIRCUIT BREAKERS
Circuit breakers are placed behind a lockable transparent cover
Restricted access IP2X protection

COLORS INFO
Legs (RAL7016). Color of crossbars and power console at your choice. See table .

Ref. RAL 2008	Ref. RAL 6018	Ref. RAL 5017	Ref. RAL 7035	Ref. RAL 7016	Thermal magnetic circuit breaker (D type)	3-phase mains on 4 safety terminals	4 power sockets 230V 2P+E	3-phase 0-430V 3.5kVA variable	Fixed 240VDC/2A insulated	Fixed 24VAC/5A with circuit breaker	Stratified bench-top dimensions (mm)
SYO-1*	SYV-1*	SYB-1*	SYG-1*	SYA-1*	x	x	x	x	x	x	2000 x 750
SYO-2*	SYV-2*	SYB-2*	SYG-2*	SYA-2*	x	x	x	x	x	x	2000 x 1000
SYO-3	SYV-3	SYB-3	SYG-3	SYA-3	x	x	x		x	x	2000 x 750
SYO-4	SYV-4	SYB-4	SYG-4	SYA-4	x	x	x		x	x	2000 x 1000
SYO-5	SYV-5	SYB-5	SYG-5	SYA-5	x	x	x			x	2000 x 750
SYO-6	SYV-6	SYB-6	SYG-6	SYA-6	x	x	x			x	2000 x 1000
SYO-7	SYV-7	SYB-7	SYG-7	SYA-7	x	x	x				2000 x 750
SYO-8	SYV-8	SYB-8	SYG-8	SYA-8	x	x	x				2000 x 1000

* Avec pied technique

ANTI-VANDALISM COVER WITH KEY


This pull-down cover in front of the electrical equipment in the console prevents students from scribbling on or vandalising the front and its equipment. Standard dimensions:1200mm and 2000mm.
System of lock with hook taken in the plate.
Compatibility with a shelf, contact us.



ref. VSG-12 for 1200mm console

ref. VSG-20 for 2000mm console

OPTION RESIDUAL CURRENT CIRCUIT BREAKER

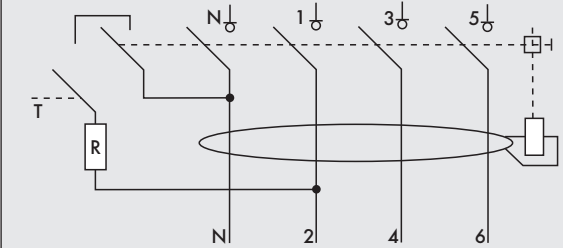

30mA protection at the front.
Useful only if the room is not equipped with this device.

ref. DIF30-4VJLV A Type (3-phase)

ref. DIF30-2VJLV A Type (single-phase)

STAND ALONE DC & AC POWER SUPPLY




LOCKABLE COVER FOR CIRCUIT BREAKERS ON THE REAR DOOR
Circuit breakers are placed behind a lockable transparent cover.
Restricted access IP2X protection.

This new technical leg design offers you the option to create a new station or to renovate existing tables. Thanks to its compactness it can act both as a table leg and as an item next to a table. This AXG** (* represents power) product is completely autonomous. With a simple three-phase mains input + neutral + earth, it can provide all the power supply combinations provided in the table below. Supplied assembled and ready to be connected to 3-phase 400V from mains.
Height of attachment under bench-top: 720 to 830mm
Length: 665mm
Total height: 1050mm (including console).
Maximum width: 250mm



OPTION RESIDUAL CURRENT CIRCUIT BREAKER

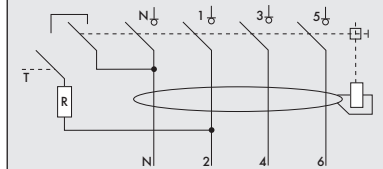

30mA protection at the front. Useful only if the room is not equipped with this device.

ref. DIF30-4VJLV A Type

Place your complete power supply unit to the right or left of your existing workbench. Bench-top attachment kit supplied.

Ref	AXG-40	AXG-20	AXG-10
Rating	4000VA	2000VA	1000VA
DC SUPPLY 0-270V *	16A	8A	7A
3-PHASE variable	0-450V/8A	0-430V/5A	0-430V/5A
AUXILIARY 0-250VDC *	2,5A	2,5A	2,5A
AUXILIARY 0-250VAC	2,5A	2,5A	2,5A
3-PHASE MAINS	4 terminals 3x400VAC	4 terminals 3x400VAC	4 terminals 3x400VAC
4 SOCKETS MAINS	230V 2P+E	230V 2P+E	230V 2P+E

* INSULATED FROM MAINS

- 1 MAIN DC SUPPLY (VARIABLE)
- 2 3-PHASE SUPPLY (VARIABLE)
- 3 DC AUXILIARY SUPPLY (VARIABLE)
- 4 SINGLE-PHASE AUXILIARY SUPPLY (VARIABLE)
- 5 3-PHASE SUPPLY (3 X 400VAC FIXED)
- 6 4 POWER SOCKETS 230V (2P + E)
- 7 EMERGENCY STOP BUTTON
- 8 PUSH BUTTON

ELECTROTECHNICAL BENCHES



Range of stand-alone, complete and reliable bench. This equipment complies with laboratory international safety standards. It is made up of 1 or 2 electrical cabinets locked by key, connected by a foot rest. The top of dimensions 2000 x 750 mm in standard is stratified. All outputs are equipped with safety terminals 4mm (Supplies & Loads).



LOCKABLE COVER FOR CIRCUIT BREAKERS
Circuit breakers are placed behind a lockable transparent cover
Restricted access IP2X protection


COLORS INFO

Legs (RAL7016). Color of crossbars and power console at your choice. See table .

4000VA					ELECTROTECHNICAL BENCHES OF 4KVA RATING						
Ref. RAL 2008	Ref. RAL 6018	Ref. RAL 5017	Ref. RAL 7035	Ref. RAL 7016	DC SUPPLY 0-270V 16A	3-PHASE 0-450V 8A	AUXILIARY 0-250VDC 2.5A	AUXILIARY 0-250VAC 2.5A	3-PHASE 3x400VAC 4 TERMINALS	4 POWER SOCKETS 230V 2P + E	LOAD
BZO-40A	BZV-40A	BZB-40A	BZG-40A	BZA-40A	x	x	x	x	x	x	RLC
BZO-40B	BZV-40B	BZB-40B	BZG-40B	BZA-40B	x	x	x	x	x	x	RL
BZO-40C	BZV-40C	BZB-40C	BZG-40C	BZA-40C	x	x	x	x	x	x	R
BZO-40D	BZV-40D	BZB-40D	BZG-40D	BZA-40D	x	x	x	x	x	x	/
BXO-40A	BXV-40A	BXB-40A	BXG-40A	BXA-40A		x	x	x	x	x	RLC
BXO-40B	BXV-40B	BXB-40B	BXG-40B	BXA-40B		x	x	x	x	x	RL
BXO-40C	BXV-40C	BXB-40C	BXG-40C	BXA-40C		x	x	x	x	x	R
BXO-40D	BXV-40D	BXB-40D	BXG-40D	BXA-40D		x	x	x	x	x	/

2000VA					ELECTROTECHNICAL BENCHES OF 2KVA RATING						
Ref. RAL 2008	Ref. RAL 6018	Ref. RAL 5017	Ref. RAL 7035	Ref. RAL 7016	DC SUPPLY 0-270V 8A	3-PHASE 0-430V 5A	AUXILIARY 0-250VDC 2,5A	AUXILIARY 0-250VAC 2,5A	3-PHASE 3x400VAC 4 TERMINALS	4 POWER SOCKETS 230V 2P + E	LOAD
BZO-20A	BZV-20A	BZB-20A	BZG-20A	BZA-20A	x	x	x	x	x	x	RLC
BZO-20B	BZV-20B	BZB-20B	BZG-20B	BZA-20B	x	x	x	x	x	x	RL
BZO-20C	BZV-20C	BZB-20C	BZG-20C	BZA-20C	x	x	x	x	x	x	R
BZO-20D	BZV-20D	BZB-20D	BZG-20D	BZA-20D	x	x	x	x	x	x	/
BXO-20A	BXV-20A	BXB-20A	BXG-20A	BXA-20A		x	x	x	x	x	RLC
BXO-20B	BXV-20B	BXB-20B	BXG-20B	BXA-20B		x	x	x	x	x	RL
BXO-20C	BXV-20C	BXB-20C	BXG-20C	BXA-20C		x	x	x	x	x	R
BXO-20D	BXV-20D	BXB-20D	BXG-20D	BXA-20D		x	x	x	x	x	/

•HARD-WEARING LAMP •INSULATED OUTPUT •LOADS INSIDE THE LEFT-HAND CABINET

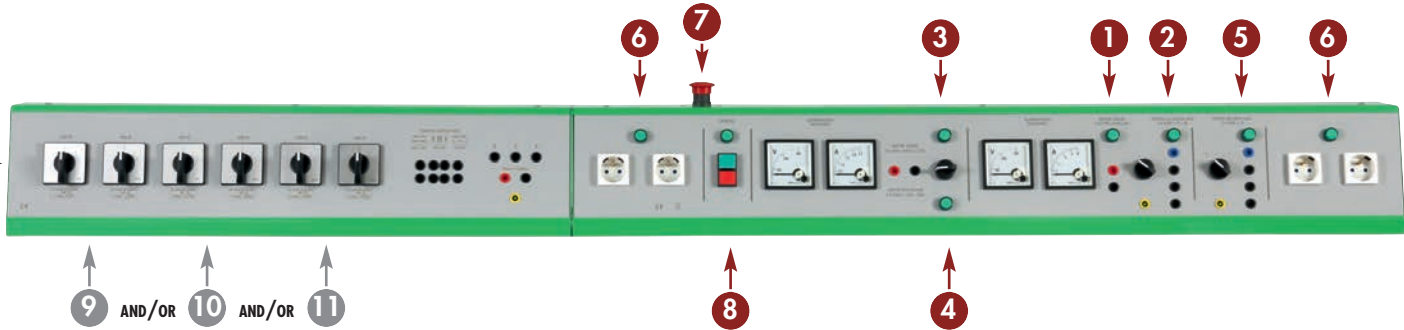

9 RESISTIVE LOAD

Consisting of a resistive wire wound on ceramic cores (protected against oxydation). The 6 switches (rapid breaking type for inductive loads) can be varied in 5% steps.
The switches are placed on the bank next to the input connectors and selector links for single-phase and DC 240V, 3-phase 240VAC or 3-phase 400VAC. (A, B, C versions only).

10 CAPACITIVE LOAD


Consisting of capacitors which can operate at 450VAC. The switches, selector links and input connectors are on the bank and easy to access. The load can be varied in 5% steps. It may be used in single-phase on DC 240V, 3-phase 240VAC or 3-phase 400VAC. (A version only)

11 INDUCTIVE LOAD

3 moveable cores moved by a control wheel and a endless screw, altering the inductance of the 3 windings allows regulation of power factor from 0.9 to 0.1 in single- or 3-phase. The links and input connectors are mounted on the console and easily accessible. It may be used in single-phase DC 240V, 3-phase 240V or 3-phase 400V. The coils are all protected by fuses (A and B versions only).



FOR YOUR SAFETY
THE DC OUTPUTS
ARE SEPARATED
FROM THE MAINS BY
SAFETY ISOLATING
TRANSFORMER

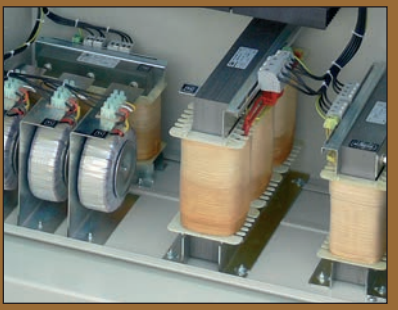

1 MAIN DC SUPPLY (BZO ET BZV ONLY)

0-270V variable and insulated from the mains by insulated transformer as specified by safety standards for the use of direct currents. The whole unit is protected against overloads and short circuits. Rectification is provided by a generously over-specified Graetz bridge (ripple rate 4%). Voltmeter and ammeter displays. A magneto-thermal circuit breaker protects this output. A contactor with a control button gives start/stop functions command, on condition that this the autotransformer output is at 0V. An indicator light shows that the unit is powered up.

2 VARIABLE 3-PHASE SUPPLY

Variable by autotransformer and protected against overloading and short circuits. The voltage range on offer is 0-430V between phases (450V for the 4000VA model). A thermal magnetic circuit breaker protects this output. A push button contact performs start/stop switching as long as the autotransformer is at 0 voltage. An indicator light shows that the unit is powered up

Main supplies 1 and 2 can't work simultaneously

3 DC AUXILIARY SUPPLY

0-250V variable by single phase autotransformer protected against overloading and short circuits. Voltmeter and ammeter displays. An On/Off button control. An indicator light shows that the unit is powered up.

Double alternating rectification, the ripple factor varies with the loads.

4 SINGLE-PHASE AUXILIARY SUPPLY

0-250V variable by single phase autotransformer protected against overloading and short circuits. Voltmeter and ammeter displays. An On/Off button control.

Main supplies 3 and 4 can't work simultaneously

5 3-PHASE SUPPLY 3 X 400VAC FIXED

On four terminals, protected, with switch and On/Off button control. An indicator light shows that the unit is powered up

6 4 POWER SOCKETS 2P + E

230V sockets (2 on either side), protected, with indicator ligts.

7 EMERGENCY STOP BUTTON

Key controlled in the centre of the console (can be mounted in alternative positions on request). It cuts out a single bank without affecting the others. Positive security stop.

8 PUSH BUTTON

Start/Stop with indicator providing start-up with "memory" function. An indicator light shows that the unit is powered up

OPTIONS FOR ELECTROTECHNICAL BENCHES

BENCH TOP IN 1000mm DEPTH

Dimensions 2000 x 1000 mm
Usable space 2000 x 850 mm

ref. AUG1000-ST

LOW SHELF

1 lowered level height 400mm
Depth 400mm

ref. TBG-200




FIXED CONTINUOUS POWER SUPPLY



DC fixed supply with
2 outputs
+15V/3.4A -15V/3.4A
ref. AD15I

24 VOLT THREE-PHASE

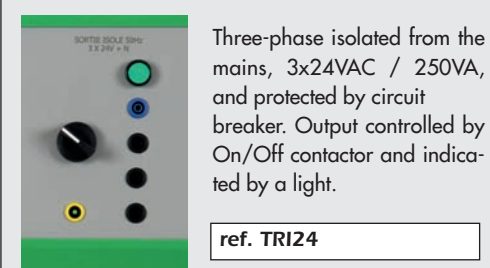

Three-phase isolated from the
mains, 3x24VAC / 250VA,
and protected by circuit
breaker. Output controlled by
On/Off contactor and indicated
by a light.

ref. TRI24

DC VARIABLE SUPPLY



Adjustable voltage
0-30V DC/5A

ref. R3005

ANTI-VANDALISM COVER WITH KEY

This pull-down cover in front of the electrical equipment in the console prevents students from scribbling on or vandalising the front and its equipment.
Standard dimensions: 1200mm and 2000mm.



ref. VSG-12
for 1200mm console

ref. VSG-20
for 2000mm console



System of lock with
hook taken in the
plate.
Compatibility with a
shelf, contact us.

360° LIGHT SIGNAL TOWERS

Beacon with 3 light indicators:
red, yellow and green Ø60mm

ref. VOY181

Beacon with 2 light indicators:
red and green Ø60mm


ref. VOY121

Beacon with a red light indicator
(voltage presence) Ø60mm

ref. VOY61


COLORS AVAILABLE UPON REQUEST

white - orange - red - green - blue



HARD-WEARING LED LAMPS

VERTICAL CABLE RACEWAY

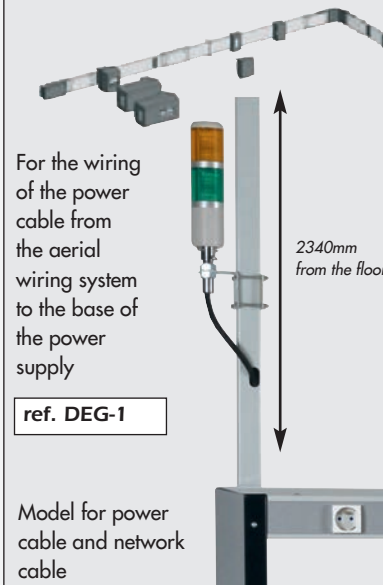

For the wiring
of the power
cable from
the aerial
wiring system
to the base of
the power
supply

ref. DEG-1


Model for power
cable and network
cable

ref. DEG-2

OPTION RESIDUAL CURRENT CIRCUIT BREAKER

30mA protection at the front. Useful
only if the room is not equipped with
this device.

ref. DIF30-4VJLV A Type

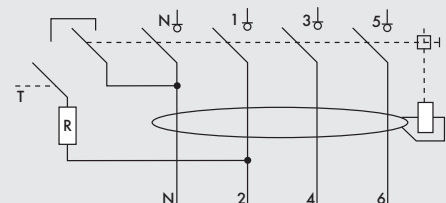


CANALIS CONNECTOR

Three-phase connector for descent of KNA channels,
with location for modular protections.
(Protections and cable not supplied).

ref. KNB25CF5




RJ45 CABLED SOCKET MODULE

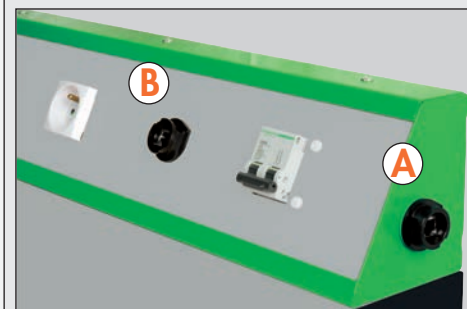

ref. CARJ45

Combination of 2 RJ45 sockets connected together in
the console. The side socket A allows the network
input, the front socket B allows the user connection.


RJ45 SOCKET MODULE

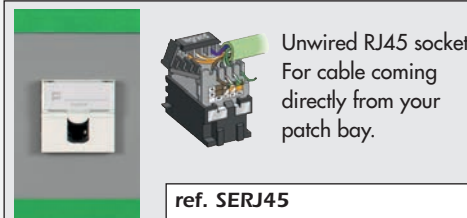

Unwired RJ45 socket.
For cable coming
directly from your
patch bay.

ref. SERJ45


INVERTER SOCKET MODULE

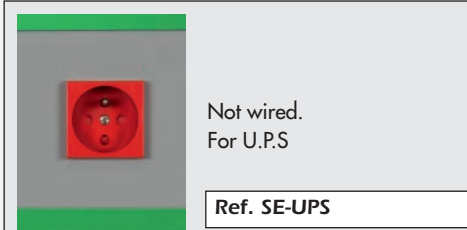

Not wired.
For U.P.S

Ref. SE-UPS

3-PHASE HYPER 16A SOCKET

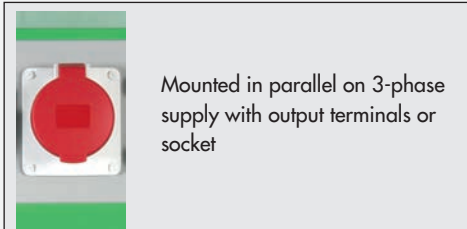

Mounted in parallel on 3-phase
supply with output terminals or
socket

ref. HP4

CONTROL AGAINST RUNAWAY

Option for DC motors.
This disengageable system al-
lows monitoring of the minimum
current of the auxiliary power
supply in order to possibly stop
the main DC source.



ref. CTRL-E

MEASURING CENTER MODULE




Measuring center option of main
power supply for stand alone bench.
Communication interface via a RJ45
port (cable not supplied).
Technical data available
on a computer via a WEB page.

ref. SE-CM

STRENGTHS LANGLOIS OF WORKSTATIONS

Significant release

Large space for legs
(including RLC stations)
means that two students
can sit each one.

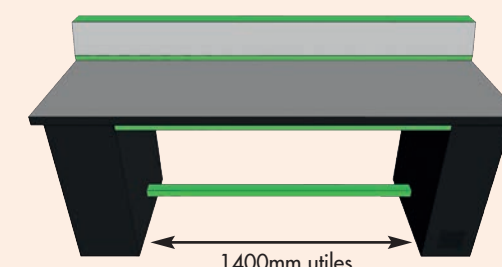


Practical workbench

These workbenches offer
the ideal working
conditions for students.



Door opening

The door of the load leg (maintenance-free) always opens outwards.
The door of the power supply leg can open both inwards and
outwards.

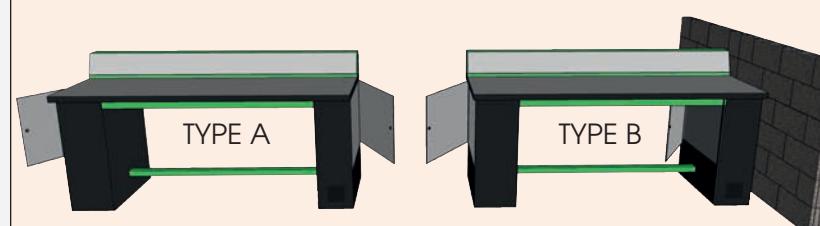

ELECTROTECHNICAL WORKSTATIONS CONTROLLED BY TOUCHSCREEN WITH ACQUISITION



COLORS INFO
Legs (RAL7016). Color of crossbars and power console at your choice. See table .

Next-generation workstation with integrated touchscreen control panel that centralizes the bench's various functions (activating or deactivating outputs, viewing real-time electrical measurement values (voltage, current, power, etc.), and exporting this data in CSV format for use in spreadsheet software). Depending on the version, it consists of one or two lockable electrical cabinets connected by three crossbars, one of which is a footrest, a standard 2000 x 750 mm laminated work surface, and a power distribution panel equipped with safety terminals for all power sources and loads.

1 TOUCH SCREEN

It allows the activation of the following outputs: (2) MAIN DC, (3) MAIN THREE-PHASE, (4) AUXILIARY DC, (5) AUXILIARY SINGLE-PHASE, (6) MAINS THREE-PHASE. It displays the electrical characteristics: voltage, current, and power in DC mode, and voltage, current, active power, reactive power, apparent power, and power factor (cos phi) in AC mode. A USB port allows the export of the various measurement points in CSV format to a digital storage device for use on a computer.





Main page
Allows you to activate the various controlled outputs. The live voltages of the AC outputs are displayed in blue and the DC outputs in green, allowing for quick and easy identification. The status of the three-phase mains output is displayed on the screen in red.




Measurement page
This adaptive screen displays data based on active outputs

Calibration page
Allows, after access control, the customization of the values on the measurement page



LOCKABLE COVER FOR CIRCUIT BREAKERS
Circuit breakers are placed behind a lockable transparent cover
Restricted access IP2X protection

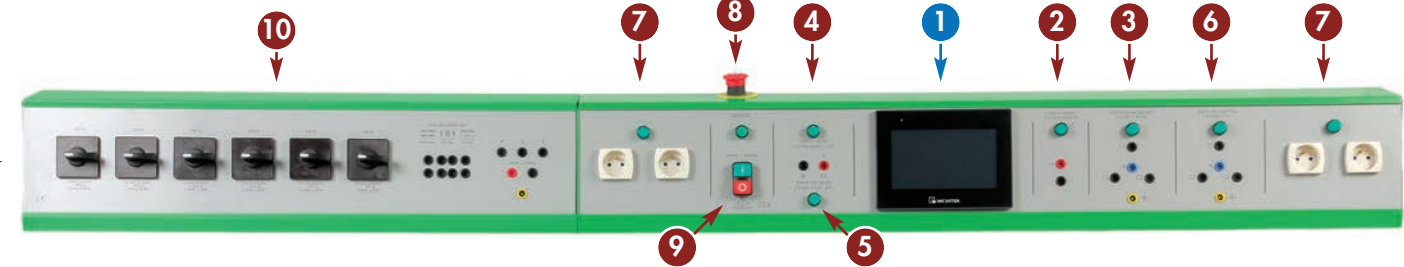

4000VA					ELECTROTECHNICAL BENCHES OF 4KVA RATING						
Réf. RAL 2008	Réf. RAL 6018	Réf. RAL 5017	Réf. RAL 7035	Réf. RAL 7016	DC SUPPLY 0-270V 16A 	3-PHASE 0-450V 8A 	AUXILIARY 0-250VDC 2.5A 	AUXILIARY 0-250VAC 2.5A 	3-PHASE 3x400VAC 4 TERMINALS 	4 POWER SOCKETS 230V 2P + E 	LOAD
BYO-40C	BYV-40C	BYB-40C	BYG-40C	BYA-40C	x	x	x	x	x	x	R
BYO-40D	BYV-40D	BYB-40D	BYG-40D	BYA-40D	x	x	x	x	x	x	/

2000VA					ELECTROTECHNICAL BENCHES OF 2KVA RATING						
Réf. RAL 2008	Réf. RAL 6018	Réf. RAL 5017	Réf. RAL 7035	Réf. RAL 7016	DC SUPPLY 0-270V 8A 	3-PHASE 0-430V 5A 	AUXILIARY 0-250VDC 2,5A 	AUXILIARY 0-250VAC 2,5A 	3-PHASE 3x400VAC 4 TERMINALS 	4 POWER SOCKETS 230V 2P + E 	LOAD
BYO-20C	BYV-20C	BYB-20C	BYG-20C	BYA-20C	x	x	x	x	x	x	R
BYO-20D	BYV-20D	BYB-20D	BYG-20D	BYA-20D	x	x	x	x	x	x	/

•HARD-WEARING LAMP •INSULATED OUTPUT •LOADS INSIDE THE LEFT-HAND CABINET

2 MAIN DC SUPPLY

0-270V variable and insulated from the mains by insulated transformer as specified by safety standards for the use of direct currents. The whole unit is protected against overloads and short circuits. Rectification is provided by a generously over-specified Graetz bridge (ripple rate 4%). Voltmeter and ammeter displays. A magneto-thermal circuit breaker protects this output. A contactor with a control button gives start/stop functions command, on condition that this the autotransformer output is at 0V. An indicator light shows that the unit is powered up.

3 VARIABLE 3-PHASE SUPPLY

Variable by autotransformer and protected against overloading and short circuits. The voltage range on offer is 0-430V between phases (450V for the 4000VA model). A thermal magnetic circuit breaker protects this output. A push button contact performs start/stop switching as long as the autotransformer is at 0 voltage. An indicator light shows that the unit is powered up

Main supplies 1 and 2 can't work simultaneously

4 DC AUXILIARY SUPPLY

0-250V variable by single phase autotransformer protected against overloading and short circuits. Voltmeter and ammeter displays. An On/Off button control. An indicator light shows that the unit is powered up. Double alternating rectification, the ripple factor varies with the loads.

5 SINGLE-PHASE AUXILIARY SUPPLY

0-250V variable by single phase autotransformer protected against overloading and short circuits. Voltmeter and ammeter displays. An On/Off button control.

Auxiliaries supplies 4 and 5 can't work simultaneously

6 3-PHASE SUPPLY 3 X 400VAC FIXED

On four terminals, protected, with switch and On/Off button control. An indicator light shows that the unit is powered up

7 4 POWER SOCKETS 2P + E

230V sockets (2 on either side), protected, with indicator lights.

8 EMERGENCY STOP BUTTON

Key controlled in the centre of the console (can be mounted in alternative positions on request). It cuts out a single bank without affecting the others. Positive security stop.


9 PUSH BUTTON

Start/Stop with indicator providing start-up with "memory" function. An indicator light shows that the unit is powered up

10 RESISTIVE LOAD

Consisting of a resistive wire wound on ceramic cores (protected against oxydation). The 6 switches (rapid breaking type for inductive loads) can be varied in 5% steps. The switches are placed on the bank next to the input connectors and selector links for single-phase and DC 240V, 3-phase 240VAC or 3-phase 400VAC.

FOR YOUR SAFETY THE DC OUTPUTS ARE SEPARATED FROM THE MAINS BY SAFETY ISOLATING TRANSFORMER



BASIC BENCHES



High temperature stratified or wood top (40 mm)
Height of the bench : 840mm (top included)
A PVC protective pad is placed underneath each foot.
Maximum load 1000kg uniformly distributed.





COLORS INFO
Legs (RAL7016). Color of crossbars and power console at your choice. See table.

STRATIFIED TOP VERSION 40mm


Dimensions (mm)	Ref. RAL 6018	Ref. RAL 2008	Ref. RAL 5017	Ref. RAL 7035	Ref. RAL 7016
670 x 750	ASV-756	ASO-756	ASB-756	ASG-756	ASA-756
1200 x 750	ASV-127	ASO-127	ASB-127	ASG-127	ASA-127
1200 x 1000	ASV-1210	ASO-1210	ASB-1210	ASG-1210	ASA-1210
1500 x 750	ASV-157	ASO-157	ASB-157	ASG-157	ASA-157
1500 x 1000	ASV-1510	ASO-1510	ASB-1510	ASG-1510	ASA-1510
1800 x 750	ASV-187	ASO-187	ASB-187	ASG-187	ASA-187
1800 x 1000	ASV-1810	ASO-1810	ASB-1810	ASG-1810	ASA-1810
2000 x 750	ASV-207	ASO-207	ASB-207	ASG-207	ASA-207
2000 x 1000	ASV-2010	ASO-2010	ASB-2010	ASG-2010	ASA-2010

WOOD TOP VERSION 40mm

Dimensions (mm)	Ref. RAL 6018	Ref. RAL 2008	Ref. RAL 5017	Ref. RAL 7035	Ref. RAL 7016
670 x 750	ABV-756	ABO-756	ABB-756	ABG-756	ABA-756
1200 x 750	ABV-127	ABO-127	ABB-127	ABG-127	ABA-127
1200 x 1000	ABV-1210	ABO-1210	ABB-1210	ABG-1210	ABA-1210
1500 x 750	ABV-157	ABO-157	ABB-157	ABG-157	ABA-157
1500 x 1000	ABV-1510	ABO-1510	ABB-1510	ABG-1510	ABA-1510
1800 x 750	ABV-187	ABO-187	ABB-187	ABG-187	ABA-187
1800 x 1000	ABV-1810	ABO-1810	ABB-1810	ABG-1810	ABA-1810
2000 x 750	ABV-207	ABO-207	ABB-207	ABG-207	ABA-207
2000 x 1000	ABV-2010	ABO-2010	ABB-2010	ABG-2010	ABA-2010

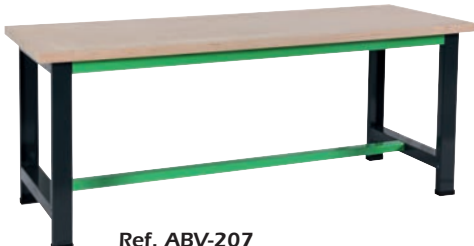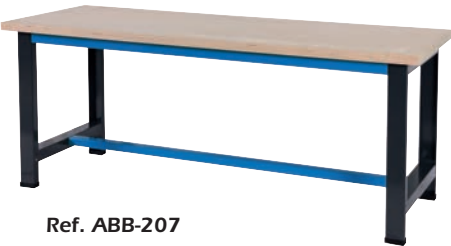

BENCHES WITH WHEELS

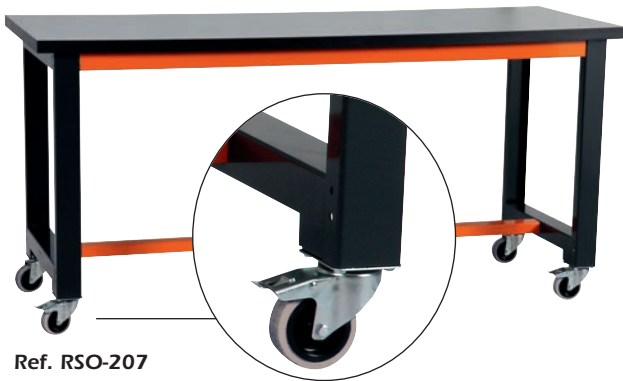

High temperature stratified or wood top (40 mm)
Height of the bench: 965mm or 840mm (top and wheels included)
4 wheels 100 mm diameter with rubber rolling band.
2 wheels have a brake.
Maximum load 500kg uniformly distributed.

COLORS INFO
Legs (RAL7016). Color of crossbars and power console at your choice. See table.




STRATIFIED TOP VERSION 40mm

	Ref. RAL 6018		Ref. RAL 2008		Ref. RAL 5017		Ref. RAL 7035		Ref. RAL 7016	
Dimensions	H 965mm	H 840mm	H 965mm	H 840mm	H 965mm	H 840mm	H 965mm	H 840mm	H 965mm	H 840mm
670 x 750	RSV-756	RSV8-756	RSO-756	RSO8-756	RSB-756	RSB8-756	RSG-756	RSG8-756	RSA-756	RSA8-756
1200 x 750	RSV-127	RSV8-127	RSO-127	RSO8-127	RSB-127	RSB8-127	RSG-127	RSG8-127	RSA-127	RSA8-127
1200 x 1000	RSV-1210	RSV8-1210	RSO-1210	RSO8-1210	RSB-1210	RSB8-1210	RSG-1210	RSG8-1210	RSA-1210	RSA8-1210
1500 x 750	RSV-157	RSV8-157	RSO-157	RSO8-157	RSB-157	RSB8-157	RSG-157	RSG8-157	RSA-157	RSA8-157
1500 x 1000	RSV-1510	RSV8-1510	RSO-1510	RSO8-1510	RSB-1510	RSB8-1510	RSG-1510	RSG8-1510	RSA-1510	RSA8-1510
1800 x 750	RSV-187	RSV8-187	RSO-187	RSO8-187	RSB-187	RSB8-187	RSG-187	RSG8-187	RSA-187	RSA8-187
1800 x 1000	RSV-1810	RSV8-1810	RSO-1810	RSO8-1810	RSB-1810	RSB8-1810	RSG-1810	RSG8-1810	RSA-1810	RSA8-1810
2000 x 750	RSV-207	RSV8-207	RSO-207	RSO8-207	RSB-207	RSB8-207	RSG-207	RSG8-207	RSA-207	RSA8-207
2000 x 1000	RSV-2010	RSV8-2010	RSO-2010	RSO8-2010	RSB-2010	RSB8-2010	RSG-2010	RSG8-2010	RSA-2010	RSA8-2010

WOOD TOP VERSION 40mm

	Ref. RAL 6018		Ref. RAL 2008		Ref. RAL 5017		Ref. RAL 7035		Ref. RAL 7016	
Dimensions	H 965mm	H 840mm	H 965mm	H 840mm	H 965mm	H 840mm	H 965mm	H 840mm	H 965mm	H 840mm
670 x 750	RBV-756	RBV8-756	RBO-756	RBO8-756	RBB-756	RBB8-756	RBG-756	RBG8-756	RBA-756	RBA8-756
1200 x 750	ABRV-127	ABRV8-127	ABRO-127	ABRO8-127	ABRB-127	ABRB8-127	ABRG-127	ABRG8-127	ABRA-127	ABRA8-127
1200 x 1000	ABRV-1210	ABRV8-1210	ABRO-1210	ABRO8-1210	ABRB-1210	ABRB8-1210	ABRG-1210	ABRG8-1210	ABRA-1210	ABRA8-1210
1500 x 750	ABRV-157	ABRV8-157	ABRO-157	ABRO8-157	ABRB-157	ABRB8-157	ABRG-157	ABRG8-157	ABRA-157	ABRA8-157
1500 x 1000	ABRV-1510	ABRV8-1510	ABRO-1510	ABRO8-1510	ABRB-1510	ABRB8-1510	ABRG-1510	ABRG8-1510	ABRA-1510	ABRA8-1510
1800 x 750	ABRV-187	ABRV8-187	ABRO-187	ABRO8-187	ABRB-187	ABRB8-187	ABRG-187	ABRG8-187	ABRA-187	ABRA8-187
1800 x 1000	ABRV-1810	ABRV8-1810	ABRO-1810	ABRO8-1810	ABRB-1810	ABRB8-1810	ABRG-1810	ABRG8-1810	ABRA-1810	ABRA8-1810
2000 x 750	ABRV-207	ABRV8-207	ABRO-207	ABRO8-207	ABRB-207	ABRB8-207	ABRG-207	ABRG8-207	ABRA-207	ABRA8-207
2000 x 1000	ABRV-2010	ABRV8-2010	ABRO-2010	ABRO8-2010	ABRB-2010	ABRB8-2010	ABRG-2010	ABRG8-2010	ABRA-2010	ABRA8-2010

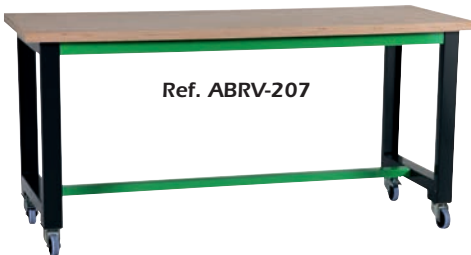

PROFESSIONAL QUALITY

Basement Guarantee

5 ANS

Accepted load

FIXE 1000 Kg

MOBILE 500 Kg

Stratified top

Heat resistant

Abrasion resistant

Scratch resistant


Easy to clean

Wood top

Impact resistant

BASIC BENCHES WITH SHELF

High temperature stratified or wood top (40mm).
Melamine shelf depth 340mm.
Height of the bench : 840mm (top included)
A PVC protective pad is placed underneath each foot.
Max load 1000kg uniformly distributed

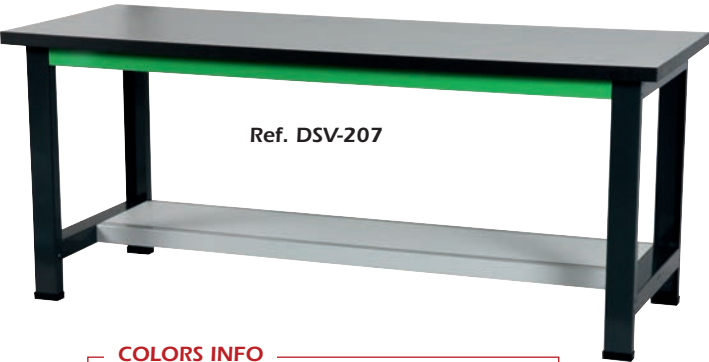

COLORS INFO
Legs (RAL7016).
Crossbars for shelf (RAL7035)
Crossbars under the top at your choice. See table

STRATIFIED TOP VERSION 40mm

Dimensions (mm)	Ref. RAL 6018	Ref. RAL 2008	Ref. RAL 5017	Ref. RAL 7035	Ref. RAL 7016
1500 x 750	DSV-157	DSO-157	DSB-157	DSG-157	DSA-157
1500 x 1000	DSV-1510	DSO-1510	DSB-1510	DSG-1510	DSA-1510
1800 x 750	DSV-187	DSO-187	DSB-187	DSG-187	DSA-187
1800 x 1000	DSV-1810	DSO-1810	DSB-1810	DSG-1810	DSA-1810
2000 x 750	DSV-207	DSO-207	DSB-207	DSG-207	DSA-207
2000 x 1000	DSV-2010	DSO-2010	DSB-2010	DSG-2010	DSA-2010

WOOD TOP VERSION 40mm

Dimensions (mm)	Ref. RAL 6018	Ref. RAL 2008	Ref. RAL 5017	Ref. RAL 7035	Ref. RAL 7016
1500 x 750	DBV-157	DBO-157	DBB-157	DBG-157	DBA-157
1500 x 1000	DBV-1510	DBO-1510	DBB-1510	DBG-1510	DBA-1510
1800 x 750	DBV-187	DBO-187	DBB-187	DBG-187	DBA-187
1800 x 1000	DBV-1810	DBO-1810	DBB-1810	DBG-1810	DBA-1810
2000 x 750	DBV-207	DBO-207	DBB-207	DBG-207	DBA-207
2000 x 1000	DBV-2010	DBO-2010	DBB-2010	DBG-2010	DBA-2010



BASIC BENCHES WITH WHEELS AND SHELF

High temperature stratified or wood top (40 mm)
Melamine shelf depth 340mm.
Height of the bench: 965mm (top and wheels included)
4 wheels 100 mm diameter with rubber rolling band.
2 wheels have a brake.
Maximum load 500kg uniformly distributed.





COLORS INFO
Legs (RAL7016).
Crossbars for shelf (RAL7035)
Crossbars under the top at your choice. See table

STRATIFIED TOP VERSION 40mm

Dimensions (mm)	Ref. RAL 6018	Ref. RAL 2008	Ref. RAL 5017	Ref. Gris RAL 7035	Ref. RAL 7016
1500 x 750	DSVR-157	DSOR-157	DSBR-157	DSGR-157	DSAR-157
1500 x 1000	DSVR-1510	DSOR-1510	DSBR-1510	DSGR-1510	DSAR-1510
1800 x 750	DSVR-187	DSOR-187	DSBR-187	DSGR-187	DSAR-187
1800 x 1000	DSVR-1810	DSOR-1810	DSBR-1810	DSGR-1810	DSAR-1810
2000 x 750	DSVR-207	DSOR-207	DSBR-207	DSGR-207	DSAR-207
2000 x 1000	DSVR-2010	DSOR-2010	DSBR-2010	DSGR-2010	DSAR-2010

WOOD TOP VERSION 40mm

Dimensions (mm)	Ref. RAL 6018	Ref. RAL 2008	Ref. RAL 5017	Ref. Gris RAL 7035	Ref. RAL 7016
1500 x 750	DBVR-157	DBOR-157	DBBR-157	DBGR-157	DBAR-157
1500 x 1000	DBVR-1510	DBOR-1510	DBBR-1510	DBGR-1510	DBAR-1510
1800 x 750	DBVR-187	DBOR-187	DBBR-187	DBGR-187	DBAR-187
1800 x 1000	DBVR-1810	DBOR-1810	DBBR-1810	DBGR-1810	DBAR-1810
2000 x 750	DBVR-207	DBOR-207	DBBR-207	DBGR-207	DBAR-207
2000 x 1000	DBVR-2010	DBOR-2010	DBBR-2010	DBGR-2010	DBAR-2010

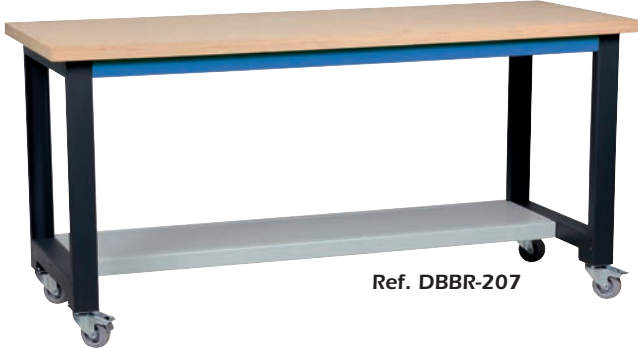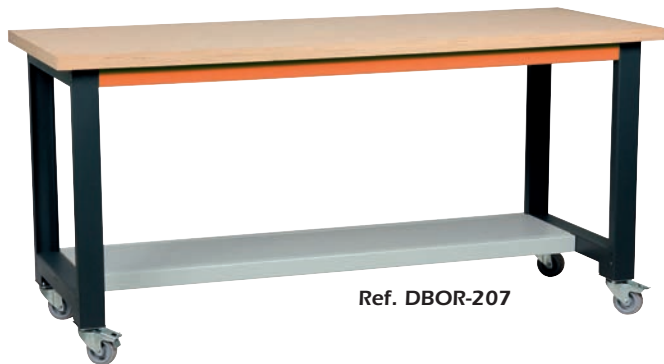

PROFESSIONAL QUALITY

Basement
Guarantee

5
ANS

Accepted
load

FIXE
1000 Kg

MOBILE
500 Kg

Stratified
top

Heat
resistant

Abrasion
resistant


Scratch
resistant

Easy
to clean

Wood
top

Impact
resistant

ADJUSTABLE HEIGHT BENCHES

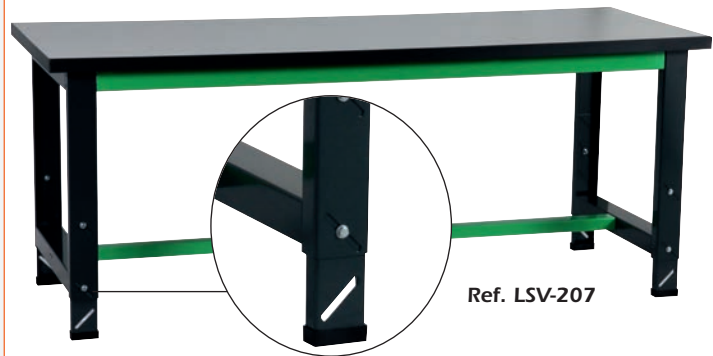

Ref. LSV-207

High temperature stratified or wood top (40 mm)
Adjustable height: 700 ~ 960mm (top included)
System with sliding foot components, adjustable continuously, tightened by screws and bolts. Each foot can be adjusted separately (if the floor is not completely flat). The strength of these adjustable benches is equal to standard benches.
A PVC protective pad is placed underneath each foot.
Maximum load 1000kg uniformly distributed.



Ref. LSO-207

COLORS INFO

Legs (RAL7016). Color of crossbars and power console at your choice. See table.

STRATIFIED TOP VERSION 40mm

Dimensions (mm)	Ref. RAL 6018	Ref. RAL 2008	Ref. RAL 5017	Ref. RAL 7035	Ref. RAL 7016
750 x 670	LSV-756	LSO-756	LSB-756	LSG-756	LSA-756
1200 x 750	LSV-127	LSO-127	LSB-127	LSG-127	LSA-127
1200 x 1000	LSV-1210	LSO-1210	LSB-1210	LSG-1210	LSA-1210
1500 x 750	LSV-157	LSO-157	LSB-157	LSG-157	LSA-157
1500 x 1000	LSV-1510	LSO-1510	LSB-1510	LSG-1510	LSA-1510
1800 x 750	LSV-187	LSO-187	LSB-187	LSG-187	LSA-187
1800 x 1000	LSV-1810	LSO-1810	LSB-1810	LSG-1810	LSA-1810
2000 x 750	LSV-207	LSO-207	LSB-207	LSG-207	LSA-207
2000 x 1000	LSV-2010	LSO-2010	LSB-2010	LSG-2010	LSA-2010

VERSION PLATEAU BOIS 40mm MULTIPLIS HETRE

Dimensions (mm)	Ref. RAL 6018	Ref. RAL 2008	Ref. RAL 5017	Ref. RAL 7035	Ref. RAL 7016
750 x 670	BBV-756	BBO-756	BBB-756	BBG-756	BBA-756
1200 x 750	BBV-127	BBO-127	BBB-127	BBG-127	BBA-127
1200 x 1000	BBV-1210	BBO-1210	BBB-1210	BBG-1210	BBA-1210
1500 x 750	BBV-157	BBO-157	BBB-157	BBG-157	BBA-157
1500 x 1000	BBV-1510	BBO-1510	BBB-1510	BBG-1510	BBA-1510
1800 x 750	BBV-187	BBO-187	BBB-187	BBG-187	BBA-187
1800 x 1000	BBV-1810	BBO-1810	BBB-1810	BBG-1810	BBA-1810
2000 x 750	BBV-207	BBO-207	BBB-207	BBG-207	BBA-207
2000 x 1000	BBV-2010	BBO-2010	BBB-2010	BBG-2010	BBA-2010



Ref. BBG-207



Ref. BBB-207



Ref. BBA-207

ADJUSTABLE HEIGHT BENCHES WITH WHEELS



Ref. LRSB-207

High temperature stratified or wood top (40 mm)
Adjustable height: 765 ~ 985mm (top included)
System with sliding foot components, adjustable continuously, tightened by screws and bolts. Each foot can be adjusted separately (if the floor is not completely flat). The strength of these adjustable benches is equal to standard benches.
4 wheels 100 mm diameter with rubber rolling band. 2 wheels have a brake.
Maximum load 500kg uniformly distributed.



Ref. LRSG-207

COLORS INFO

Legs (RAL7016). Color of crossbars and power console at your choice. See table.

STRATIFIED TOP VERSION 40mm

Dimensions (mm)	Ref. RAL 6018	Ref. RAL 2008	Ref. RAL 5017	Ref. RAL 7035	Ref. RAL 7016
750 x 670	LRSV-756	LRSO-756	LRSB-756	LRSG-756	LRSA-756
1200 x 750	LRSV-127	LRSO-127	LRSB-127	LRSG-127	LRSA-127
1200 x 1000	LRSV-1210	LRSO-1210	LRSB-1210	LRSG-1210	LRSA-1210
1500 x 750	LRSV-157	LRSO-157	LRSB-157	LRSG-157	LRSA-157
1500 x 1000	LRSV-1510	LRSO-1510	LRSB-1510	LRSG-1510	LRSA-1510
1800 x 750	LRSV-187	LRSO-187	LRSB-187	LRSG-187	LRSA-187
1800 x 1000	LRSV-1810	LRSO-1810	LRSB-1810	LRSG-1810	LRSA-1810
2000 x 750	LRSV-207	LRSO-207	LRSB-207	LRSG-207	LRSA-207
2000 x 1000	LRSV-2010	LRSO-2010	LRSB-2010	LRSG-2010	LRSA-2010

VERSION PLATEAU BOIS 40mm MULTIPLIS HETRE

Dimensions (mm)	Ref. RAL 6018	Ref. RAL 2008	Ref. RAL 5017	Ref. RAL 7035	Ref. RAL 7016
750 x 670	LRBV-756	LRBO-756	LRBB-756	LRBG-756	LRBA-756
1200 x 750	LRBV-127	LRBO-127	LRBB-127	LRBG-127	LRBA-127
1200 x 1000	LRBV-1210	LRBO-1210	LRBB-1210	LRBG-1210	LRBA-1210
1500 x 750	LRBV-157	LRBO-157	LRBB-157	LRBG-157	LRBA-157
1500 x 1000	LRBV-1510	LRBO-1510	LRBB-1510	LRBG-1510	LRBA-1510
1800 x 750	LRBV-187	LRBO-187	LRBB-187	LRBG-187	LRBA-187
1800 x 1000	LRBV-1810	LRBO-1810	LRBB-1810	LRBG-1810	LRBA-1810
2000 x 750	LRBV-207	LRBO-207	LRBB-207	LRBG-207	LRBA-207
2000 x 1000	LRBV-2010	LRBO-2010	LRBB-2010	LRBG-2010	LRBA-2010

PROFESSIONAL QUALITY

Basement
Guarantee

5
ANS

Accepted
load

FIXE
1000 Kg

MOBILE
500 Kg

Stratified
top

Heat
resistant

Abrasion
resistant


Scratch
resistant


Easy
to clean


Wood
top

Impact
resistant

BENCHES WITH LEG-MOUNTED CABINET WITH DRAWERS

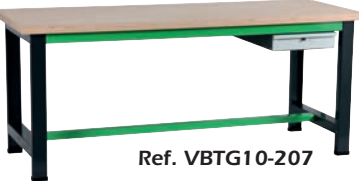
BENCHES WITH 1 DRAWER	TOP	Dims (mm)	Ref. RAL 6018	Ref. RAL 2008	Ref. RAL 5017	Ref. RAL 7035	Ref. RAL 7016
• Height 840mm top included • Cabinet with 1 drawer H100mm. - Can be placed anywhere under the bench top  	STRATIFIED	1500 x 750	XSV-157	XSO-157	XSB-157	XSG-157	XSA-157
	WOOD	1500 x 750	VBTG10-157	OBTG10-157	BBTG10-157	GBTG10-157	ABTG10-157
	STRATIFIED	1500 x 1000	XSV-1510	XSO-1510	XSB-1510	XSG-1510	XSA-1510
	WOOD	1500 x 1000	VBTG10-1510	OBTG10-1510	BBTG10-1510	GBTG10-1510	ABTG10-1510
	STRATIFIED	1800 x 750	XSV-187	XSO-187	XSB-187	XSG-187	XSA-187
	WOOD	1800 x 750	VBTG10-187	OBTG10-187	BBTG10-187	GBTG10-187	ABTG10-187
	STRATIFIED	1800 x 1000	XSV-1810	XSO-1810	XSB-1810	XSG-1810	XSA-1810
	WOOD	1800 x 1000	VBTG10-1810	OBTG10-1810	BBTG10-1810	GBTG10-1810	ABTG10-1810
	STRATIFIED	2000 x 750	XSV-207	XSO-207	XSB-207	XSG-207	XSA-207
	WOOD	2000 x 750	VBTG10-207	OBTG10-207	BBTG10-207	GBTG10-207	ABTG10-207
	STRATIFIED	2000 x 1000	XSV-2010	XSO-2010	XSB-2010	XSG-2010	XSA-2010
	WOOD	2000 x 1000	VBTG10-2010	OBTG10-2010	BBTG10-2010	GBTG10-2010	ABTG10-2010

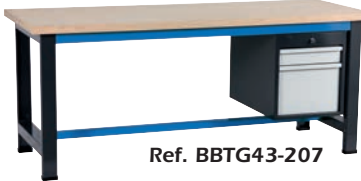BENCHES WITH 2 DRAWERS	TOP	Dims (mm)	Ref. RAL 6018	Ref. RAL 2008	Ref. RAL 5017	Ref. RAL 7035	Ref. RAL 7016
• Height 840mm top included • Cabinet with 2 drawers H100mm and H300mm. - Can be placed anywhere under the bench top  	STRATIFIED	1500 x 750	WSV-157	WSO-157	WSB-157	WSG-157	WSA-157
	WOOD	1500 x 750	VBTG43-157	OBTG43-157	BBTG43-157	GBTG43-157	ABTG43-157
	STRATIFIED	1500 x 1000	WSV-1510	WSO-1510	WSB-1510	WSG-1510	WSA-1510
	WOOD	1500 x 1000	VBTG43-1510	OBTG43-1510	BBTG43-1510	GBTG43-1510	ABTG43-1510
	STRATIFIED	1800 x 750	WSV-187	WSO-187	WSB-187	WSG-187	WSA-187
	WOOD	1800 x 750	VBTG43-187	OBTG43-187	BBTG43-187	GBTG43-187	ABTG43-187
	STRATIFIED	1800 x 1000	WSV-1810	WSO-1810	WSB-1810	WSG-1810	WSA-1810
	WOOD	1800 x 1000	VBTG43-1810	OBTG43-1810	BBTG43-1810	GBTG43-1810	ABTG43-1810
	STRATIFIED	2000 x 750	WSV-207	WSO-207	WSB-207	WSG-207	WSA-207
	WOOD	2000 x 750	VBTG43-207	OBTG43-207	BBTG43-207	GBTG43-207	ABTG43-207
	STRATIFIED	2000 x 1000	WSV-2010	WSO-2010	WSB-2010	WSG-2010	WSA-2010
	WOOD	2000 x 1000	VBTG43-2010	OBTG43-2010	BBTG43-2010	GBTG43-2010	ABTG43-2010

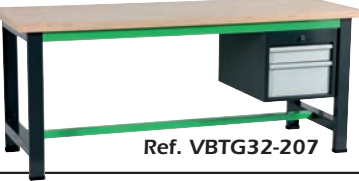BENCHES WITH 2 DRAWERS	TOP	Dims (mm)	Ref. RAL 6018	Ref. RAL 2008	Ref. RAL 5017	Ref. RAL 7035	Ref. RAL 7016
• Height 840mm top included • Cabinet with 2 drawers H100mm and H200mm. - Can be placed anywhere under the bench top  	STRATIFIED	1500 x 750	ZSV-157	ZSO-157	ZSB-157	ZSG-157	ZSA-157
	WOOD	1500 x 750	VBTG32-157	OBTG32-157	BBTG32-157	GBTG32-157	ABTG32-157
	STRATIFIED	1500 x 1000	ZSV-1510	ZSO-1510	ZSB-1510	ZSG-1510	ZSA-1510
	WOOD	1500 x 1000	VBTG32-1510	OBTG32-1510	BBTG32-1510	GBTG32-1510	ABTG32-1510
	STRATIFIED	1800 x 750	ZSV-187	ZSO-187	ZSB-187	ZSG-187	ZSA-187
	WOOD	1800 x 750	VBTG32-187	OBTG32-187	BBTG32-187	GBTG32-187	ABTG32-187
	STRATIFIED	1800 x 1000	ZSV-1810	ZSO-1810	ZSB-1810	ZSG-1810	ZSA-1810
	WOOD	1800 x 1000	VBTG32-1810	OBTG32-1810	BBTG32-1810	GBTG32-1810	ABTG32-1810
	STRATIFIED	2000 x 750	ZSV-207	ZSO-207	ZSB-207	ZSG-207	ZSA-207
	WOOD	2000 x 750	VBTG32-207	OBTG32-207	BBTG32-207	GBTG32-207	ABTG32-207
	STRATIFIED	2000 x 1000	ZSV-2010	ZSO-2010	ZSB-2010	ZSG-2010	ZSA-2010
	WOOD	2000 x 1000	VBTG32-2010	OBTG32-2010	BBTG32-2010	GBTG32-2010	ABTG32-2010

BENCHES WITH 2 DRAWERS	TOP	Dims (mm)	Ref. RAL 6018	Ref. RAL 2008	Ref. RAL 5017	Ref. RAL 7035	Ref. RAL 7016
• Height 840mm top included • Cabinet with 2 drawers H200mm - Can be placed anywhere under the bench top  	STRATIFIED	1500 x 750	USV-157	USO-157	USB-157	USG-157	USA-157
	WOOD	1500 x 750	VBTG42-157	OBTG42-157	BBTG42-157	GBTG42-157	ABTG42-157
	STRATIFIED	1500 x 1000	USV-1510	USO-1510	USB-1510	USG-1510	USA-1510
	WOOD	1500 x 1000	VBTG42-1510	OBTG42-1510	BBTG42-1510	GBTG42-1510	ABTG42-1510
	STRATIFIED	1800 x 750	USV-187	USO-187	USB-187	USG-187	USA-187
	WOOD	1800 x 750	VBTG42-187	OBTG42-187	BBTG42-187	GBTG42-187	ABTG42-187
	STRATIFIED	1800 x 1000	USV-1810	USO-1810	USB-1810	USG-1810	USA-1810
	WOOD	1800 x 1000	VBTG42-1810	OBTG42-1810	BBTG42-1810	GBTG42-1810	ABTG42-1810
	STRATIFIED	2000 x 750	USV-207	USO-207	USB-207	USG-207	USA-207
	WOOD	2000 x 750	VBTG42-207	OBTG42-207	BBTG42-207	GBTG42-207	ABTG42-207
	STRATIFIED	2000 x 1000	USV-2010	USO-2010	USB-2010	USG-2010	USA-2010
	WOOD	2000 x 1000	VBTG42-2010	OBTG42-2010	BBTG42-2010	GBTG42-2010	ABTG42-2010

BENCHES WITH 3 DRAWERS	TOP	Dims (mm)	Ref. RAL 6018	Ref. RAL 2008	Ref. RAL 5017	Ref. RAL 7035	Ref. RAL 7016
• Height 840mm top included • Cabinet with 3 drawers H100mm. - Can be placed anywhere under the bench top  	STRATIFIED	1500 x 750	SSV-157	SSO-157	SSB-157	SSG-157	SSA-157
	WOOD	1500 x 750	VBTG30-157	OBTG30-157	BBTG30-157	GBTG30-157	ABTG30-157
	STRATIFIED	1500 x 1000	SSV-1510	SSO-1510	SSB-1510	SSG-1510	SSA-1510
	WOOD	1500 x 1000	VBTG30-1510	OBTG30-1510	BBTG30-1510	GBTG30-1510	ABTG30-1510
	STRATIFIED	1800 x 750	SSV-187	SSO-187	SSB-187	SSG-187	SSA-187
	WOOD	1800 x 750	VBTG30-187	OBTG30-187	BBTG30-187	GBTG30-187	ABTG30-187
	STRATIFIED	1800 x 1000	SSV-1810	SSO-1810	SSB-1810	SSG-1810	SSA-1810
	WOOD	1800 x 1000	VBTG30-1810	OBTG30-1810	BBTG30-1810	GBTG30-1810	ABTG30-1810
	STRATIFIED	2000 x 750	SSV-207	SSO-207	SSB-207	SSG-207	SSA-207
	WOOD	2000 x 750	VBTG30-207	OBTG30-207	BBTG30-207	GBTG30-207	ABTG30-207
	STRATIFIED	2000 x 1000	SSV-2010	SSO-2010	SSB-2010	SSG-2010	SSA-2010
	WOOD	2000 x 1000	VBTG30-2010	OBTG30-2010	BBTG30-2010	GBTG30-2010	ABTG30-2010

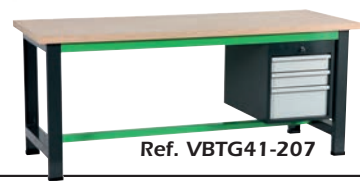BENCHES WITH 3 DRAWERS	TOP	Dims (mm)	Ref. RAL 6018	Ref. RAL 2008	Ref. RAL 5017	Ref. RAL 7035	Ref. RAL 7016
• Height 840mm top included • Cabinet with 2 drawers H100mm and H200mm. - Can be placed anywhere under the bench top  	STRATIFIED	1500 x 750	YSV-157	YSO-157	YSB-157	YSG-157	YSA-157
	WOOD	1500 x 750	VBTG41-157	OBTG41-157	BBTG41-157	GBTG41-157	ABTG41-157
	STRATIFIED	1500 x 1000	YSV-1510	YSO-1510	YSB-1510	YSG-1510	YSA-1510
	WOOD	1500 x 1000	VBTG41-1510	OBTG41-1510	BBTG41-1510	GBTG41-1510	ABTG41-1510
	STRATIFIED	1800 x 750	YSV-187	YSO-187	YSB-187	YSG-187	YSA-187
	WOOD	1800 x 750	VBTG41-187	OBTG41-187	BBTG41-187	GBTG41-187	ABTG41-187
	STRATIFIED	1800 x 1000	YSV-1810	YSO-1810	YSB-1810	YSG-1810	YSA-1810
	WOOD	1800 x 1000	VBTG41-1810	OBTG41-1810	BBTG41-1810	GBTG41-1810	ABTG41-1810
	STRATIFIED	2000 x 750	YSV-207	YSO-207	YSB-207	YSG-207	YSA-207
	WOOD	2000 x 750	VBTG41-207	OBTG41-207	BBTG41-207	GBTG41-207	ABTG41-207
	STRATIFIED	2000 x 1000	YSV-2010	YSO-2010	YSB-2010	YSG-2010	YSA-2010
	WOOD	2000 x 1000	VBTG41-2010	OBTG41-2010	BBTG41-2010	GBTG41-2010	ABTG41-2010

Basement Guarantee

5 ANS

Accepted load



Stratified top









Wood top



Characteristics common to hanging chests

Safe with lock

- Drawers on ball bearings
- Removable drawers
- L = 450mm / H = 800mm
- P = 665 or 890mm

Ball bearing

Our drawers mounted on bearings ball slides easily and without noise. Easily removable.



Hanging files

The 300 height drawers are directly compatible with hanging files.



BENCHES WITH LEG-MOUNTED CABINET

LEG-MOUNTED CABINET WITH DOOR	TOP	Dims (mm)	Ref. RAL 6018	Ref. RAL 2008	Ref. RAL 5017	Ref. RAL 7035	Ref. RAL 7016
	STRATIFIED	1500 x 750	80TV-157S	80TO-157S	80TB-157S	80TG-157S	80TA-157S
	WOOD	1500 x 750	80TV-157B	80TO-157B	80TB-157B	80TG-157B	80TA-157B
	STRATIFIED	1500 x 1000	80TV-1510S	80TO-1510S	80TB-1510S	80TG-1510S	80TA-1510S
	WOOD	1500 x 1000	80TV-1510B	80TO-1510B	80TB-1510B	80TG-1510B	80TA-1510B
	STRATIFIED	1800 x 750	80TV-187S	80TO-187S	80TB-187S	80TG-187S	80TA-187S
	WOOD	1800 x 750	80TV-187B	80TO-187B	80TB-187B	80TG-187B	80TA-187B
	STRATIFIED	1800 x 1000	80TV-1810S	80TO-1810S	80TB-1810S	80TG-1810S	80TA-1810S
	WOOD	1800 x 1000	80TV-1810B	80TO-1810B	80TB-1810B	80TG-1810B	80TA-1810B
	STRATIFIED	2000 x 750	80TV-207S	80TO-207S	80TB-207S	80TG-207S	80TA-207S
	WOOD	2000 x 750	80TV-207B	80TO-207B	80TB-207B	80TG-207B	80TA-207B
	STRATIFIED	2000 x 1000	80TV-2010S	80TO-2010S	80TB-2010S	80TG-2010S	80TA-2010S
	WOOD	2000 x 1000	80TV-2010B	80TO-2010B	80TB-2010B	80TG-2010B	80TA-2010B

LEG-MOUNTED CABINET - 3 DRAWERS	TOP	Dims (mm)	Ref. RAL 6018	Ref. RAL 2008	Ref. RAL 5017	Ref. RAL 7035	Ref. RAL 7016
	STRATIFIED	1500 x 750	31TV-157S	31TO-157S	31TB-157S	31TG-157S	31TA-157S
	WOOD	1500 x 750	31TV-157B	31TO-157B	31TB-157B	31TG-157B	31TA-157B
	STRATIFIED	1500 x 1000	31TV-1510S	31TO-1510S	31TB-1510S	31TG-1510S	31TA-1510S
	WOOD	1500 x 1000	31TV-1510B	31TO-1510B	31TB-1510B	31TG-1510B	31TA-1510B
	STRATIFIED	1800 x 750	31TV-187S	31TO-187S	31TB-187S	31TG-187S	31TA-187S
	WOOD	1800 x 750	31TV-187B	31TO-187B	31TB-187B	31TG-187B	31TA-187B
	STRATIFIED	1800 x 1000	31TV-1810S	31TO-1810S	31TB-1810S	31TG-1810S	31TA-1810S
	WOOD	1800 x 1000	31TV-1810B	31TO-1810B	31TB-1810B	31TG-1810B	31TA-1810B
	STRATIFIED	2000 x 750	31TV-207S	31TO-207S	31TB-207S	31TG-207S	31TA-207S
	WOOD	2000 x 750	31TV-207B	31TO-207B	31TB-207B	31TG-207B	31TA-207B
	STRATIFIED	2000 x 1000	31TV-2010S	31TO-2010S	31TB-2010S	31TG-2010S	31TA-2010S
	WOOD	2000 x 1000	31TV-2010B	31TO-2010B	31TB-2010B	31TG-2010B	31TA-2010B

LEG-MOUNTED CABINET - 4 DRAWERS	TOP	Dims (mm)	Ref. RAL 6018	Ref. RAL 2008	Ref. RAL 5017	Ref. RAL 7035	Ref. RAL 7016
	STRATIFIED	1500 x 750	43TV-157S	43TO-157S	43TB-157S	43TG-157S	43TA-157S
	WOOD	1500 x 750	43TV-157B	43TO-157B	43TB-157B	43TG-157B	43TA-157B
	STRATIFIED	1500 x 1000	43TV-1510S	43TO-1510S	43TB-1510S	43TG-1510S	43TA-1510S
	WOOD	1500 x 1000	43TV-1510B	43TO-1510B	43TB-1510B	43TG-1510B	43TA-1510B
	STRATIFIED	1800 x 750	43TV-187S	43TO-187S	43TB-187S	43TG-187S	43TA-187S
	WOOD	1800 x 750	43TV-187B	43TO-187B	43TB-187B	43TG-187B	43TA-187B
	STRATIFIED	1800 x 1000	43TV-1810S	43TO-1810S	43TB-1810S	43TG-1810S	43TA-1810S
	WOOD	1800 x 1000	43TV-1810B	43TO-1810B	43TB-1810B	43TG-1810B	43TA-1810B
	STRATIFIED	2000 x 750	43TV-207S	43TO-207S	43TB-207S	43TG-207S	43TA-207S
	WOOD	2000 x 750	43TV-207B	43TO-207B	43TB-207B	43TG-207B	43TA-207B
	STRATIFIED	2000 x 1000	43TV-2010S	43TO-2010S	43TB-2010S	43TG-2010S	43TA-2010S
	WOOD	2000 x 1000	43TV-2010B	43TO-2010B	43TB-2010B	43TG-2010B	43TA-2010B

LEG-MOUNTED CABINET - 5 DRAWERS	TOP	Dims (mm)	Ref. RAL 6018	Ref. RAL 2008	Ref. RAL 5017	Ref. RAL 7035	Ref. RAL 7016
	STRATIFIED	1500 x 750	50TV-157S	50TO-157S	50TB-157S	50TG-157S	50TA-157S
	WOOD	1500 x 750	50TV-157B	50TO-157B	50TB-157B	50TG-157B	50TA-157B
	STRATIFIED	1500 x 1000	50TV-1510S	50TO-1510S	50TB-1510S	50TG-1510S	50TA-1510S
	WOOD	1500 x 1000	50TV-1510B	50TO-1510B	50TB-1510B	50TG-1510B	50TA-1510B
	STRATIFIED	1800 x 750	50TV-187S	50TO-187S	50TB-187S	50TG-187S	50TA-187S
	WOOD	1800 x 750	50TV-187B	50TO-187B	50TB-187B	50TG-187B	50TA-187B
	STRATIFIED	1800 x 1000	50TV-1810S	50TO-1810S	50TB-1810S	50TG-1810S	50TA-1810S
	WOOD	1800 x 1000	50TV-1810B	50TO-1810B	50TB-1810B	50TG-1810B	50TA-1810B
	STRATIFIED	2000 x 750	50TV-207S	50TO-207S	50TB-207S	50TG-207S	50TA-207S
	WOOD	2000 x 750	50TV-207B	50TO-207B	50TB-207B	50TG-207B	50TA-207B
	STRATIFIED	2000 x 1000	50TV-2010S	50TO-2010S	50TB-2010S	50TG-2010S	50TA-2010S
	WOOD	2000 x 1000	50TV-2010B	50TO-2010B	50TB-2010B	50TG-2010B	50TA-2010B

LEG-MOUNTED CABINET - 6 DRAWERS	TOP	Dims (mm)	Ref. RAL 6018	Ref. RAL 2008	Ref. RAL 5017	Ref. RAL 7035	Ref. RAL 7016
	STRATIFIED	1500 x 750	60TV-157S	60TO-157S	60TB-157S	60TG-157S	60TA-157S
	WOOD	1500 x 750	60TV-157B	60TO-157B	60TB-157B	60TG-157B	60TA-157B
	STRATIFIED	1500 x 1000	60TV-1510S	60TO-1510S	60TB-1510S	60TG-1510S	60TA-1510S
	WOOD	1500 x 1000	60TV-1510B	60TO-1510B	60TB-1510B	60TG-1510B	60TA-1510B
	STRATIFIED	1800 x 750	60TV-187S	60TO-187S	60TB-187S	60TG-187S	60TA-187S
	WOOD	1800 x 750	60TV-187B	60TO-187B	60TB-187B	60TG-187B	60TA-187B
	STRATIFIED	1800 x 1000	60TV-1810S	60TO-1810S	60TB-1810S	60TG-1810S	60TA-1810S
	WOOD	1800 x 1000	60TV-1810B	60TO-1810B	60TB-1810B	60TG-1810B	60TA-1810B
	STRATIFIED	2000 x 750	60TV-207S	60TO-207S	60TB-207S	60TG-207S	60TA-207S
	WOOD	2000 x 750	60TV-207B	60TO-207B	60TB-207B	60TG-207B	60TA-207B
	STRATIFIED	2000 x 1000	60TV-2010S	60TO-2010S	60TB-2010S	60TG-2010S	60TA-2010S
	WOOD	2000 x 1000	60TV-2010B	60TO-2010B	60TB-2010B	60TG-2010B	60TA-2010B

LEG-MOUNTED CABINET - 7 DRAWERS	TOP	Dims (mm)	Ref. RAL 6018	Ref. RAL 2008	Ref. RAL 5017	Ref. RAL 7035	Ref. RAL 7016
	STRATIFIED	1500 x 750	70TV-157S	70TO-157S	70TB-157S	70TG-157S	70TA-157S
	WOOD	1500 x 750	70TV-157B	70TO-157B	70TB-157B	70TG-157B	70TA-157B
	STRATIFIED	1500 x 1000	70TV-1510S	70TO-1510S	70TB-1510S	70TG-1510S	70TA-1510S
	WOOD	1500 x 1000	70TV-1510B	70TO-1510B	70TB-1510B	70TG-1510B	70TA-1510B
	STRATIFIED	1800 x 750	70TV-187S	70TO-187S	70TB-187S	70TG-187S	70TA-187S
	WOOD	1800 x 750	70TV-187B	70TO-187B	70TB-187B	70TG-187B	70TA-187B
	STRATIFIED	1800 x 1000	70TV-1810S	70TO-1810S	70TB-1810S	70TG-1810S	70TA-1810S
	WOOD	1800 x 1000	70TV-1810B	70TO-1810B	70TB-1810B	70TG-1810B	70TA-1810B
	STRATIFIED	2000 x 750	70TV-207S	70TO-207S	70TB-207S	70TG-207S	70TA-207S
	WOOD	2000 x 750	70TV-207B	70TO-207B	70TB-207B	70TG-207B	70TA-207B
	STRATIFIED	2000 x 1000	70TV-2010S	70TO-2010S	70TB-2010S	70TG-2010S	70TA-2010S
	WOOD	2000 x 1000	70TV-2010B	70TO-2010B	70TB-2010B	70TG-2010B	70TA-2010B

Basement Guarantee

5 ANS

Accepted load

 **FIXE**
1000 Kg

Stratified top

 Heat resistant

 Abrasion resistant

 Scratch resistant

 Easy to clean

Wood top

 Impact resistant

Characteristics common to chests

Safe with lock


Our drawers mounted on bearings ball slides easily and without noise. Easily removable.


Ball bearing

Our drawers mounted on bearings ball slides easily and without noise. Easily removable.

Hanging files

The 300 height drawers are directly compatible with hanging files.









BENCHES WITH SHELF AND/OR POWER CONSOLES

BENCHES WITH LOW SHELF

- 4 power sockets with circuit breaker* and indicator light
- High temperature stratified top 40mm. Max load 1000kg uniformly distributed.
- Shelf adjustable in height. Max height: 400mm. Depth: 400mm.
- Height top included 840mm. Height of the bench shelf included: 1240mm.

Dims. (mm)	Ref. RAL6018	Ref. RAL2008	Ref. RAL5017	Ref. RAL7035	Ref. RAL7016
1800 x 750	GSV-187	GSO-187	GSB-187	GSG-187	GSA-187
1800 x 1000	GSV-1810	GSO-1810	GSB-1810	GSG-1810	GSA-1810
2000 x 750	GSV-207	GSO-207	GSB-207	GSG-207	GSA-207
2000 x 1000	GSV-2010	GSO-2010	GSB-2010	GSG-2010	GSA-2010

Wiring info: All sockets are supplied wired (mains cable not supplied)



BENCHES WITH LOW SHELF AND POWER CONSOLE

- 6 power sockets with circuit breaker* and indicator light on the power console
- 4 power sockets with circuit breaker* and indicator light on the shelf
- High temperature stratified top 40mm. Max load 1000kg uniformly distributed.
- Shelf adjustable in height. Max height: 400mm. Depth: 400mm.
- Height top included 840mm. Height of the bench shelf included: 1240mm

Dims. (mm)	Ref. RAL6018	Ref. RAL2008	Ref. RAL5017	Ref. RAL7035	Ref. RAL7016
1800 x 750	JSV-187	JSO-187	JSB-187	JSG-187	JSA-187
1800 x 1000	JSV-1810	JSO-1810	JSB-1810	JSG-1810	JSA-1810
2000 x 750	JSV-207	JSO-207	JSB-207	JSG-207	JSA-207
2000 x 1000	JSV-2010	JSO-2010	JSB-2010	JSG-2010	JSA-2010

Wiring info: All sockets are supplied wired (mains cable not supplied)



BENCHES WITH HIGH SHELF AND POWER CONSOLE

- 6 power sockets with circuit breaker* and indicator light on the power console
- 4 power sockets with circuit breaker* and indicator light on the shelf
- High temperature stratified top 40mm. Max load 1000kg uniformly distributed.
- Shelf adjustable in height. Max height: 650mm. Depth: 400mm.
- Height top included 840mm. Height of the bench shelf included: 1490mm

Dims. (mm)	Ref. RAL6018	Ref. RAL2008	Ref. RAL5017	Ref. RAL7035	Ref. RAL7016
1800 x 750	KSV-187	KSO-187	KSB-187	KSG-187	KSA-187
1800 x 1000	KSV-1810	KSO-1810	KSB-1810	KSG-1810	KSA-1810
2000 x 750	KSV-207	KSO-207	KSB-207	KSG-207	KSA-207
2000 x 1000	KSV-2010	KSO-2010	KSB-2010	KSG-2010	KSA-2010

Wiring info: All sockets are supplied wired (mains cable not supplied)



* Thermal magnetic circuit breaker on standard

Option 30mA residual current circuit breaker: Add «D» at the end of the reference. Ex: GSV-187D

BENCHES WITH POWER CONSOLE

- 6 power sockets with circuit breaker* and indicator light
- High temperature stratified top 40mm. Max load 1000kg uniformly distributed.
- A PVC protective pad is placed underneath each foot.
- Height of the bench top included 840mm. Total height 960mm.

Dims. (mm)	Ref. RAL6018	Ref. RAL2008	Ref. RAL5017	Ref. RAL7035	Ref. RAL7016
1800 x 750	FSV-187	FSO-187	FSB-187	FSG-187	FSA-187
1800 x 1000	FSV-1810	FSO-1810	FSB-1810	FSG-1810	FSA-1810
2000 x 750	FSV-207	FSO-207	FSB-207	FSG-207	FSA-207
2000 x 1000	FSV-2010	FSO-2010	FSB-2010	FSG-2010	FSA-2010

Wiring info: All sockets are supplied wired (mains cable not supplied)



BENCHES WITH POWER CONSOLE WITH EMERGENCY STOP PUSH-BUTTON

- 6 power sockets with circuit breaker* and indicator light + 1 emergency stop push-button.
- High temperature stratified top 40mm. Max load 1000kg uniformly distributed.
- A PVC protective pad is placed underneath each foot.
- Height of the bench top included 840mm. Total height 960mm.


Dims. (mm)	Ref. RAL6018	Ref. RAL2008	Ref. RAL5017	Ref. RAL7035	Ref. RAL7016
1800 x 750	ESV-187	ESO-187	ESB-187	ESG-187	ESA-187
1800 x 1000	ESV-1810	ESO-1810	ESB-1810	ESG-1810	ESA-1810
2000 x 750	ESV-207	ESO-207	ESB-207	ESG-207	ESA-207
2000 x 1000	ESV-2010	ESO-2010	ESB-2010	ESG-2010	ESA-2010

Wiring info: All sockets are supplied wired (mains cable not supplied)



DISSIPATIVE ANTISTATIC MAT OPTION

Double-layer vinyl mat
(gray top layer / black foam bottom layer)
Thickness 2 mm (gray layer 0.2 mm, black layer 1.8 mm)
Surface resistivity: 10E6 - 10E9 ohm/m².
Temperature resistance: max. 200°C.
Dimensions: 700 x 1000 mm.
Can be cut with a simple cutter.

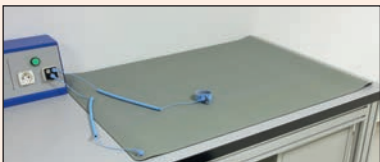

Comes with 1 operator wristband, 2 cords, and 1 three-prong power adapter (European and Schuko type) for grounding the mat and wristband.

ref. TAP108



Comes with 1 operator wristband with cord, 2 cords allowing you to connect the mat using a snap button or a crocodile clip or a 4mm stud.

ref. TAP-ESD

ANTISTATIC WRIST STRAP OPTION



Adjustable fabric anti-static wrist strap designed to prevent the buildup of static electricity on the body.
Comes with an extendable cord (0.5m - 2.5mm).
The cord is equipped with a 2M Ohm resistor.
Connects with a 10mm stud.

ref. BRA-ESD

ESD SOCKET ADAPTER



Enables simple and secure grounding via three 10mm studs. It can be connected to a 2P+E type E (European) or type F (SCHUKO) socket.

ref. PRI-ESD

OPTIONAL GROUNDING BRACKET



Designed for mounting under a worktop. It allows users and other components in the anti-static zone to be connected to ground. The bracket, with three 10mm studs, is equipped with a 1M Ohm resistor.

ref. SE-ESD

Guarantee

5 YEARS

Accepted load

FIXE 1000 Kg

PROFESSIONAL QUALITY

Stratified top

Heat resistant

Abrasion resistant

Scratch resistant

Easy to clean

Wood top

Impact resistant

ELECTRICALLY ADJUSTABLE TABLES WITH MEMORY



Electric command affixed under the worktop.
4 memorized positions.
Digital height display.

Dimensions (mm)	Ref.
1200 x 750	TAB-EL127
1500 x 750	TAB-EL157
1800 x 750	TAB-EL187
2000 x 750	TAB-EL207



Existe avec coffre
suspendu à tiroirs.
Nous consulter

VERSIONS WITH CONSOLE

- Power console equipped with 6 PCs
with indicator light and circuit breaker

Dimensions (mm)	Ref.
1200 x 750	TAB-EL127-P
1500 x 750	TAB-EL157-P
1800 x 750	TAB-EL187-P
2000 x 750	TAB-EL207-P



MANUAL ADJUSTABLE TABLES



Retractable ergonomic handle

- Table manually adjustable in height thanks to an ergonomic re-tractable handle
- Adjustable height from 760 to 1100mm (Top included)
 - Top in 40mm thick gray laminate.
 - C-shaped metal base.
 - Load 150kg distributed over the surface.

Dimensions (mm)	Ref.
1200 x 750	TAB-MA127
1500 x 750	TAB-MA157
1800 x 750	TAB-MA187
2000 x 750	TAB-MA207



VERSIONS WITH CONSOLE

- Power console equipped with 6 PCs
with indicator light and circuit breaker

Dimensions (mm)	Ref.
1200 x 750	TAB-MA127-P
1500 x 750	TAB-MA157-P
1800 x 750	TAB-MA187-P
2000 x 750	TAB-MA207-P

WORK TABLES SEATED STANDING



Adjustable from 725 to 1050mm.

Grey melamine worktop 19mm thick, depth 670mm.
Bench height: Adjustable. Maximum height 1050mm (worktop included).
Separate adjustment of each worktop (double sided).
Matt anodized aluminium stand.
Lasting protection against corrosion.
Load 200kg distributed on the surface.

SINGLE VERSION

	Without shelf	With shelf
Dimensions (mm)	Ref.	Ref.
1000 x 670	TLG1-1000	TLG3-1000
1400 x 670	TLG1-1400	TLG3-1400
1800 x 670	TLG1-1800	TLG3-1800
2000 x 670	TLG1-2000	TLG3-2000



Adjustable from 725 to 1050mm.

TWO-SIDED VERSION

	Without shelf	With shelf
Dimensions (mm)	Ref.	Ref.
1000 x 670	TLG2-1000	TLG4-1000
1400 x 670	TLG2-1400	TLG4-1400
1800 x 670	TLG2-1800	TLG4-1800
2000 x 670	TLG2-2000	TLG4-2000

BASIC WORK TABLES



200KG PAINTED ALUMINIUM VER-
SIONS: RAL7016 + RAL6018 OR RAL2008

Dimensions (mm)	Réf. RAL6018	Réf. RAL2008
1000 x 670	TTV-1067	TTO-1067
1200 x 670	TTV-1267	TTO-1267
1400 x 670	TTV-1467	TTO-1467
1800 x 670	TTV-1867	TTO-1867
2000 x 670	TTV-2067	TTO-2067

200KG PLAIN ALUMINIUM VERSIONS

Dimensions (mm)	Réf.
1000 x 670	TTG-1067
1200 x 670	TTG-1267
1400 x 670	TTG-1467
1800 x 670	TTG-1867
2000 x 670	TTG-2067

Great stability, no side movement thanks to horizontal aluminium profiles with cross-section 80 x 40 mm (40 x 40 mm for TT*-1067) and four feet 40 x 40 mm with plastic pads.

- Grey melamine worktop 19mm thick.
- Bench height 760mm (worktop included).
- Matt anodized aluminium stand.
- Lasting protection against corrosion.
- Load 70 to 300kg distributed on the surface.

70KG PLAIN ALUMINIUM VERSIONS

Dimensions (mm)	Réf.
1000 x 670	TTGE-1067
1200 x 670	TTGE-1267
1400 x 670	TTGE-1467
1800 x 670	TTGE-1867
2000 x 670	TTGE-2067

LIGHT WORK TABLE WITH STRIP AND DOUBLE ADJUSTABLE SHELF




Great stability, no side movement thanks to horizontal aluminium profiles with cross-section 80x40mm and four feet 40x40mm with plastic pads. Supplied with assembly instructions.

- Matt anodized aluminium stand. Lasting protection against corrosion.
- High-temperature stratified worktop 40mm. 200kg load evenly distributed (max).
- Electric strip equipped with 4 sockets 2P+E with indicator light and circuit-breaker 16A.
- 1 fixed shelf 2000 x 400mm grey melamine 19mm.
- 1 height-adjustable shelf 2000 x 300mm grey melamine 19mm.
- Height on worktop 840mm. Total height of unit 1550mm.

	Thermal magnetic circuit breaker	30mA residual current circuit breaker
Dims. (mm)	Réf	Réf
1800 x 750	ERG-187	ERG-187D
1800 x 1000	ERG-1810	ERG-1810D
2000 x 750	ERG-207	ERG-207D
2000 x 1000	ERG-2010	ERG-2010D

CONFIGURE YOUR OWN BENCH
PAGES 28 TO 39

RAL FOR
crossbars & consoles



RAL obligatory
for the legs



RAL obligatory
for the cabinets



RAL obligatory
for the shelves



www.langlois-france.com



Configurateur
d'établis

Configurateur >

En 2 minutes chrono !



Garantie

5
ANS

BASEMENT
Pages 28 - 31



TOP
Page 32



CONSOLES
Pages 33 - 35



SHELVES
Pages 36 - 37




ACCESSORIES
Pages 38 - 39

SELECTION OF YOUR BASEMENT

HIGH FIXED BASE

Height 800mm
PVC protective pad underneath each foot.
Maximum load 1000kg.

Composition
2 single legs + 3 crossbars

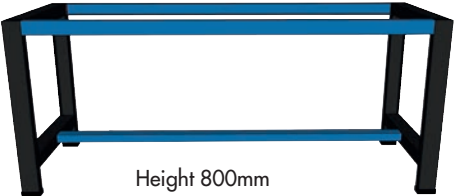


COLORS INFO
Legs (RAL7016). Color of crossbars and power console at your choice. See table.

For top (mm)	Ref. RAL 6018	Ref. RAL 2008	Ref. RAL 5017	Ref. RAL 7035	Ref. RAL 7016
750 x 670	PSV-756	PSO-756	PSB-756	PSG-756	PSA-756
1200 x 750	PSV-127	PSO-127	PSB-127	PSG-127	PSA-127
1200 x 1000	PSV-1210	PSO-1210	PSB-1210	PSG-1210	PSA-1210
1500 x 750	PSV-157	PSO-157	PSB-157	PSG-157	PSA-157
1500 x 1000	PSV-1510	PSO-1510	PSB-1510	PSG-1510	PSA-1510
1800 x 750	PSV-187	PSO-187	PSB-187	PSG-187	PSA-187
1800 x 1000	PSV-1810	PSO-1810	PSB-1810	PSG-1810	PSA-1810
2000 x 750	PSV-207	PSO-207	PSB-207	PSG-207	PSA-207
2000 x 1000	PSV-2010	PSO-2010	PSB-2010	PSG-2010	PSA-2010

BASEMENT WITH WHEELS - HEIGHT 800mm or 925mm

Height 800mm or 925mm
4 wheels 100 mm diameter with rubber rolling band.
2 wheels have a brake.

Composition
2 legs with wheels + 3 crossbars

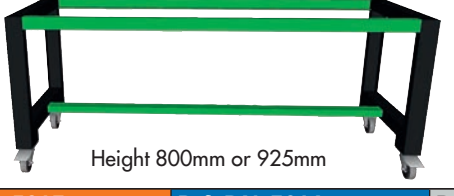


COLORS INFO
Legs (RAL7016). Color of crossbars and power console at your choice. See table.

	Ref. RAL 6018	Ref. RAL 5017	Ref. RAL 7016	Ref. RAL 7035	Ref. RAL 7016
For top (mm)	H 925mm	H 800mm	H 925mm	H 800mm	H 925mm
750 x 670	PMV-756	PMV8-756	PMO-756	PMO8-756	PMB-756
1200 x 750	PMV-127	PMV8-127	PMO-127	PMO8-127	PMB-127
1200 x 1000	PMV-1210	PMV8-1210	PMO-1210	PMO8-1210	PMB-1210
1500 x 750	PMV-157	PMV8-157	PMO-157	PMO8-157	PMB-157
1500 x 1000	PMV-1510	PMV8-1510	PMO-1510	PMO8-1510	PMB-1510
1800 x 750	PMV-187	PMV8-187	PMO-187	PMO8-187	PMB-187
1800 x 1000	PMV-1810	PMV8-1810	PMO-1810	PMO8-1810	PMB-1810
2000 x 750	PMV-207	PMV8-207	PMO-207	PMO8-207	PMB-207
2000 x 1000	PMV-2010	PMV8-2010	PMO-2010	PMO8-2010	PMB-2010

HIGH FIXED BASE + SHELF

Height 800mm
Melamine shelf depth 340mm.
PVC protective pad.

Composition
2 single legs + 4 crossbars + shelf

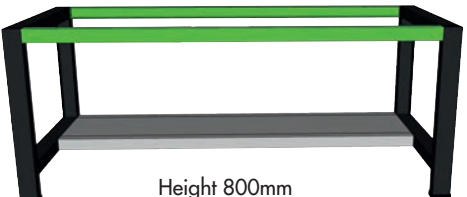


COLORS INFO
Legs (RAL7016).
Crossbars for shelf (RAL7035)
Crossbars under the top at your choice. See table

For top (mm)	Ref. RAL 6018	Ref. RAL 2008	Ref. RAL 5017	Ref. RAL 7035	Ref. RAL 7016
750 x 670	PTV-756	PTO-756	PTB-756	PTG-756	PTA-756
1200 x 750	PTV-127	PTO-127	PTB-127	PTG-127	PTA-127
1200 x 1000	PTV-1210	PTO-1210	PTB-1210	PTG-1210	PTA-1210
1500 x 750	PTV-157	PTO-157	PTB-157	PTG-157	PTA-157
1500 x 1000	PTV-1510	PTO-1510	PTB-1510	PTG-1510	PTA-1510
1800 x 750	PTV-187	PTO-187	PTB-187	PTG-187	PTA-187
1800 x 1000	PTV-1810	PTO-1810	PTB-1810	PTG-1810	PTA-1810
2000 x 750	PTV-207	PTO-207	PTB-207	PTG-207	PTA-207
2000 x 1000	PTV-2010	PTO-2010	PTB-2010	PTG-2010	PTA-2010

BASEMENT WITH WHEELS + SHELF

Height 925mm
Melamine shelf depth 340mm.
4 wheels 100 mm diameter with rubber rolling band.
2 wheels have a brake.

Composition
2 legs with wheels + 4 crossbars + shelf

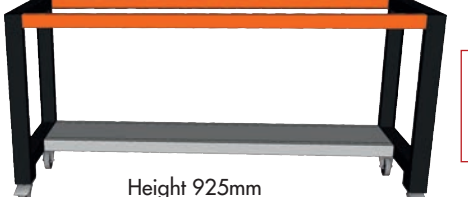


COLORS INFO
Legs (RAL7016).
Crossbars for shelf (RAL7035)
Crossbars under the top at your choice. See table

For top (mm)	Ref. RAL 6018	Ref. RAL 2008	Ref. RAL 5017	Ref. RAL 7035	Ref. RAL 7016
750 x 670	PTVR-756	PTOR-756	PTBR-756	PTGR-756	PTAR-756
1200 x 750	PTVR-127	PTOR-127	PTBR-127	PTGR-127	PTAR-127
1200 x 1000	PTVR-1210	PTOR-1210	PTBR-1210	PTGR-1210	PTAR-1210
1500 x 750	PTVR-157	PTOR-157	PTBR-157	PTGR-157	PTAR-157
1500 x 1000	PTVR-1510	PTOR-1510	PTBR-1510	PTGR-1510	PTAR-1510
1800 x 750	PTVR-187	PTOR-187	PTBR-187	PTGR-187	PTAR-187
1800 x 1000	PTVR-1810	PTOR-1810	PTBR-1810	PTGR-1810	PTAR-1810
2000 x 750	PTVR-207	PTOR-207	PTBR-207	PTGR-207	PTAR-207
2000 x 1000	PTVR-2010	PTOR-2010	PTBR-2010	PTGR-2010	PTAR-2010

ADJUSTABLE HEIGHT BASE

Adjustable height : 660 to 920mm
System with sliding foot components, adjustable continuously, tightened by screws and bolts. Each foot can be adjusted separately. PVC protective pad.

Composition
2 adjustable legs + 3 crossbars

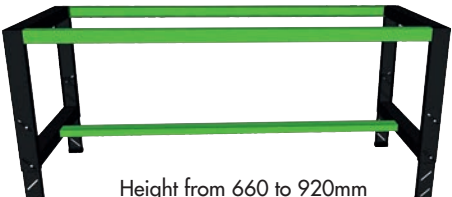


COLORS INFO
Legs (RAL7016). Color of crossbars and power console at your choice. See table.

For top (mm)	Ref. RAL 6018	Ref. RAL 2008	Ref. RAL 5017	Ref. RAL 7035	Ref. RAL 7016
750 x 670	PRV-756	PRO-756	PRB-756	PRG-756	PRA-756
1200 x 750	PRV-127	PRO-127	PRB-127	PRG-127	PRA-127
1200 x 1000	PRV-1210	PRO-1210	PRB-1210	PRG-1210	PRA-1210
1500 x 750	PRV-157	PRO-157	PRB-157	PRG-157	PRA-157
1500 x 1000	PRV-1510	PRO-1510	PRB-1510	PRG-1510	PRA-1510
1800 x 750	PRV-187	PRO-187	PRB-187	PRG-187	PRA-187
1800 x 1000	PRV-1810	PRO-1810	PRB-1810	PRG-1810	PRA-1810
2000 x 750	PRV-207	PRO-207	PRB-207	PRG-207	PRA-207
2000 x 1000	PRV-2010	PRO-2010	PRB-2010	PRG-2010	PRA-2010

ADJUSTABLE HEIGHT BASE WITH WHEELS

Adjustable height : 725 to 945mm
System with sliding foot components, adjustable continuously, tightened by screws and bolts. Each foot can be adjusted separately. PVC protective pad.

Composition
2 adjustable legs + 3 crossbars

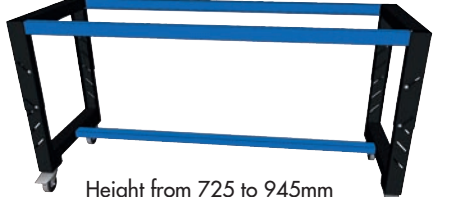

COLORS INFO
Legs (RAL7016). Color of crossbars and power console at your choice. See table.

For top (mm)	Ref. RAL 6018	Ref. RAL 2008	Ref. RAL 5017	Ref. RAL 7035	Ref. RAL 7016
750 x 670	PRRV-756	PRRO-756	PRRB-756	PRRG-756	PRRA-756
1200 x 750	PRRV-127	PRRO-127	PRRB-127	PRRG-127	PRRA-127
1200 x 1000	PRRV-1210	PRRO-1210	PRRB-1210	PRRG-1210	PRRA-1210
1500 x 750	PRRV-157	PRRO-157	PRRB-157	PRRG-157	PRRA-157
1500 x 1000	PRRV-1510	PRRO-1510	PRRB-1510	PRRG-1510	PRRA-1510
1800 x 750	PRRV-187	PRRO-187	PRRB-187	PRRG-187	PRRA-187
1800 x 1000	PRRV-1810	PRRO-1810	PRRB-1810	PRRG-1810	PRRA-1810
2000 x 750	PRRV-207	PRRO-207	PRRB-207	PRRG-207	PRRA-207
2000 x 1000	PRRV-2010	PRRO-2010	PRRB-2010	PRRG-2010	PRRA-2010

HANGING DRAWERS

400 SERIES HANGING CHESTS WITH LOCK

Compatible with 750 and 1000mm trays. Height 490mm - Width 450mm. As standard, all keys are identical. Different keys on request.

4 drawers height 100mm

ref. TIG-40



2 drawers height 100mm
1 drawer height 200mm

ref. TIG-41



2 drawers height 200mm

ref. TIG-42



1 drawer height 100mm
1 drawer height 300mm
The 300mm height drawers are directly compatible with the suspension files.

ref. TIG-43



Chest with hinged door with lock. Opening of l=420mm x h=390mm. A shelf, 2 compartments.

ref. TIG-P



300 SERIES HANGING CHESTS WITH LOCK

Compatible with 750 and 1000mm trays. Height 390mm - Width 450mm. As standard, all keys are identical. Different keys on request.

3 drawers height 100mm

ref. TIG-30



1 drawer height 100mm
1 drawer height 200mm

ref. TIG-32



1 drawer height 300mm
The 300mm height drawers are directly compatible with the suspension files.

ref. TIG-33



100 SERIES HANGING CHESTS WITH LOCK

Compatible with 750 and 1000mm trays. Height 100mm - Width 400mm. As standard, all keys are identical. Different keys on request.

ref. TIG-10





The drawers in the suspended chests and the chest feet are mounted on ball bearings to slide easily and silently. They are removable for permutations or for sorting operations.

COMPOSITION OF YOUR BASE WITH LEG-MOUNTED CABINET

BASEMENT + LEG MOUNTED CABINET	For top (mm)	Ref. RAL 6018	Ref. RAL 2008	Ref. RAL 5017	Ref. RAL 7035	Ref. RAL 7016
 CHOOSE ONE BASEMENT Composition 1 single leg + 3 crossbars. CHOOSE ONE CABINET Choose from the 18 references available. Height 800mm	1200 x 750	PCV-127	PCO-127	PCB-127	PCG-127	PCA-127
	1200 x 1000	PCV-1210	PCO-1210	PCB-1210	PCG-1210	PCA-1210
	1500 x 750	PCV-157	PCO-157	PCB-157	PCG-157	PCA-157
	1500 x 1000	PCV-1510	PCO-1510	PCB-1510	PCG-1510	PCA-1510
	1800 x 750	PCV-187	PCO-187	PCB-187	PCG-187	PCA-187
	1800 x 1000	PCV-1810	PCO-1810	PCB-1810	PCG-1810	PCA-1810
	2000 x 750	PCV-207	PCO-207	PCB-207	PCG-207	PCA-207
	2000 x 1000	PCV-2010	PCO-2010	PCB-2010	PCG-2010	PCA-2010

- Leg mounted cabinets with lock. Dimensions : W = 450mm - H = 800mm - D = 665mm (Ref-75 for 750mm top) or 890mm (Ref-100 for 1000mm top)
- The drawers are mounted on ball bearings so they slide easily and silently. They are removable so drawers can be switched around or sorted.
- The lock secures all the drawers at the same time. In standard, all keys are identical. Different keys can be available upon request.
- Drawers with a height of 300 mm are suitable for standard hanging folders.

Height of drawers
100
300
300



ref. 30G-75
ref. 30G-100

Height of drawers
200
200
300



ref. 31G-75
ref. 31G-100

Height of drawers
100
150
150
300



ref. 40G-75
ref. 40G-100

Height of drawers
100
100
200
300



ref. 41G-75
ref. 41G-100

Height of drawers
150
150
200
200



ref. 42G-75
ref. 42G-100

Height of drawers
100
200
200
200



ref. 43G-75
ref. 43G-100

Height of drawers
100
100
100
100
300



ref. 50G-75
ref. 50G-100

Height of drawers
100
150
150
150
150



ref. 51G-75
ref. 51G-100

Height of drawers
100
100
150
150
200



ref. 52G-75
ref. 52G-100

Height of drawers
100
100
100
200
200



ref. 53G-75
ref. 53G-100

Height of drawers
100
100
100
150
150



ref. 60G-75
ref. 60G-100

Height of drawers
100
100
100
100
200



ref. 61G-75
ref. 61G-100

Height of drawers
100
100
100
100
100
100



ref. 70G-75
ref. 70G-100

Cabinet with lockable swing door. Can be opened from the left or the right (through reversal). W = 450mm. H = 800mm. D = 665 or 890mm. 2 shelves / 3 levels



ref. PTG-75
ref. PTG-100

LAYOUT OF DRAWERS IN CABINET OR HANGING DRAWERS

The drawers are easily removable. Mounted on ball bearings, the drawers slide easily and silently. They receive 3 types of molded cells allowing them to be compartmentalized:

- Small : 75x75 H55mm
- Medium : 285x75 H55mm fitted with a removable divider
- Large : 415x75 H55mm fitted with three removable dividers



REF. AMN-08
4 small & 16 large
8 to 20 compartments

REF. AMN-20
18 small & 2 large
20 to 22 compartments

REF. AMN-16
12 small & 4 large
16 to 20 compartments

REF. AMN-24
24 small
24 compartments

THICKNESS 40mm

THICKNESS 40mm

Stratified top

Heat resistant

Abrasion resistant

Scratch resistant

Easy to clean

Wooden top

Impact resistant

WIDTH	DEPTH	Ref.
1200mm	750mm	GP127
1200mm	1000mm	GP1210
1500mm	750mm	GP157
1500mm	1000mm	GP1510
1800mm	750mm	GP187
1800mm	1000mm	GP1810
2000mm	750mm	GP207
2000mm	1000mm	GP2010

WIDTH	DEPTH	Ref.
1200mm	750mm	PL-PL-120x75
1200mm	1000mm	PL-PL-120x100
1500mm	750mm	PL-PL-150x75
1500mm	1000mm	PL-PL-150x100
1800mm	750mm	PL-PL-180x75
1800mm	1000mm	PL-PL-180x100
2000mm	750mm	PL-PL-200x75
2000mm	1000mm	PL-PL-200x100

SHORT POWER CONSOLES 500MM

- 4 2P+E sockets with LED indicator
- 1 30mA magnetothermal or differential circuit breaker
- Cable gland
- Fully wired but mains cable not supplied


	Circuit-breaker	
	magnetothermal	30mA differential
Ref. RAL 6018	VXV-1	VXV-2
Ref. RAL 2008	VXO-1	VXO-2
Ref. RAL 5017	VXB-1	VXB-2
Ref. RAL 7035	VXG-1	VXG-2
Ref. RAL7016	VXA-1	VXA-2

VERTICAL POWER CONSOLES 600mm

- 4 power sockets 230V and 1 circuit breaker
- With column Ø50mm and fastening system.
- Height adjustable and swiveling
- Sockets are wired but the power cable is not supplied.

magnetothermal circuit-breaker	
Ref. RAL 6018	VPV-640
Ref. RAL 2008	VPO-640
Ref. RAL 5017	VPB-640
Ref. RAL 7035	VPG-640
Ref. RAL7016	VPA-640

30mA residual current circuit breaker	
Ref. RAL 6018	VPV-640-D
Ref. RAL 2008	VPO-640-D
Ref. RAL 5017	VPB-640-D
Ref. RAL 7035	VPG-640-D
Ref. RAL7016	VPA-640-D

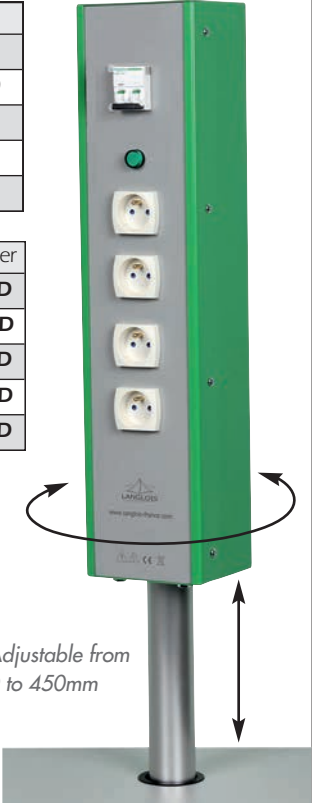

Adjustable from 0 to 450mm

POWER CONSOLES

Information : All power sockets are wired. (Power cable of the console not supplied)

Power console with a PVC front panel.




Ref. RAL6018	Ref. RAL2008	Ref. RAL5017	Ref. RAL7035	Ref. RAL7016	Console lenght (mm)	For top dim. (mm)	Circuit breaker	Socket 2P+E	LED indicator	Key operated emergency stop button	ON/OFF button
RAV-12	RAO-12	RAB-12	RAG-12	RAA-12	1120	1200	Thermal magnetic	6	1		
RAV-12D	RAO-12D	RAB-12D	RAG-12D	RAA-12D	1120	1200	30mA residual current	6	1		
RAV-15	RAO-15	RAB-15	RAG-15	RAA-15	1430	1500	Thermal magnetic	6	1		
RAV-15D	RAO-15D	RAB-15D	RAG-15D	RAA-15D	1430	1500	30mA residual current	6	1		
RAV-18	RAO-18	RAB-18	RAG-18	RAA-18	1730	1800	Thermal magnetic	6	1		
RAV-18D	RAO-18D	RAB-18D	RAG-18D	RAA-18D	1730	1800	30mA residual current	6	1		
RAV-20	RAO-20	RAB-20	RAG-20	RAA-20	1920	2000	Thermal magnetic	6	1		
RAV-20D	RAO-20D	RAB-20D	RAG-20D	RAA-20D	1920	2000	30mA residual current	6	1		
PAV-12	PAO-12	PAB-12	PAG-12	PAA-12	1120	1200	Thermal magnetic	6	1	1	
PAV-12D	PAO-12D	PAB-12D	PAG-12D	PAA-12D	1120	1200	30mA residual current	6	1	1	
PAV-15	PAO-15	PAB-15	PAG-15	PAA-15	1430	1500	Thermal magnetic	6	1	1	
PAV-15D	PAO-15D	PAB-15D	PAG-15D	PAA-15D	1430	1500	30mA residual current	6	1	1	
PAV-18	PAO-18	PAB-18	PAG-18	PAA-18	1730	1800	Thermal magnetic	6	1	1	
PAV-18D	PAO-18D	PAB-18D	PAG-18D	PAA-18D	1730	1800	30mA residual current	6	1	1	
PAV-20	PAO-20	PAB-20	PAG-20	PAA-20	1920	2000	Thermal magnetic	6	1	1	
PAV-20D	PAO-20D	PAB-20D	PAG-20D	PAA-20D	1920	2000	30mA residual current	6	1	1	
MAV-12	MAO-12	MAB-12	MAG-12	MAA-12	1120	1200	Thermal magnetic	6	1	1	1
MAV-12D	MAO-12D	MAB-12D	MAG-12D	MAA-12D	1120	1200	30mA residual current	6	1	1	1
MAV-15	MAO-15	MAB-15	MAG-15	MAA-15	1430	1500	Thermal magnetic	6	1	1	1
MAV-15D	MAO-15D	MAB-15D	MAG-15D	MAA-15D	1430	1500	30mA residual current	6	1	1	1
MAV-18	MAO-18	MAB-18	MAG-18	MAA-18	1730	1800	Thermal magnetic	6	1	1	1
MAV-18D	MAO-18D	MAB-18D	MAG-18D	MAA-18D	1730	1800	30mA residual current	6	1	1	1
MAV-20	MAO-20	MAB-20	MAG-20	MAA-20	1920	2000	Thermal magnetic	6	1	1	1
MAV-20D	MAO-20D	MAB-20D	MAG-20D	MAA-20D	1920	2000	30mA residual current	6	1	1	1

Circuit breaker info: Magnetothermal: protection against overloads and short circuits.
30mA differential: protection against overloads and short circuits + high sensitivity protection against electrocution, 30mA.

600MM MOBILE ELECTRIC RAMP

600mm wide ramp to be fixed using its 2 clamps on any type of board with a thickness of 19 to 40mm.
Supplied with a 3m cable and mains plug.

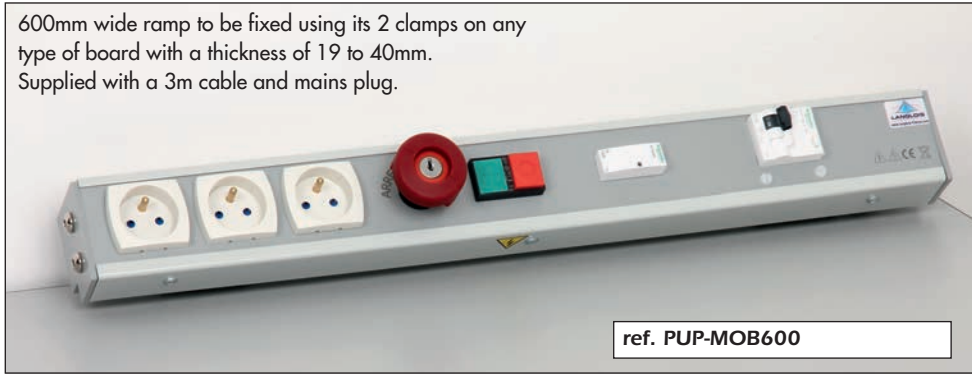

ref. PUP-MOB600



CONFIGURE YOUR OWN POWER CONSOLE


First choose your bare desk then select the electrical modules and options.

Dims/Ref.	RAL 6018	RAL 2008	RAL 5017	RAL 7035	RAL 7016
500mm	TEV-05	TEO-05	TEB-05	TEG-05	TEA-05
1120mm	TEV-12	TEO-12	TEB-12	TEG-12	TEA-12
1430mm	TEV-15	TEO-15	TEB-15	TEG-15	TEA-15
1730mm	TEV-18	TEO-18	TEB-18	TEG-18	TEA-18
1920mm	TEV-20	TEO-20	TEB-20	TEG-20	TEA-20

Color	Ref.
RAL 6018	VPV-600
RAL 2008	VPO-600
RAL 5017	VPB-600
RAL 7035	VPG-600
RAL 7016	VPA-600

Console height 600mm.

Adjustable from 0 to 450mm

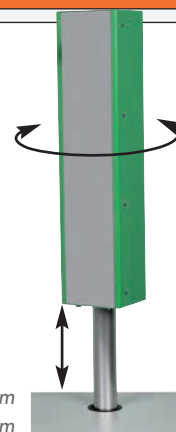

Dims/Ref.	RAL 6018	RAL 2008	RAL 5017	RAL 7035	RAL 7016
1200mm	PUV-32-12	PUO-32-12	PUB-32-12	PUG-32-12	PUA-32-12
1500mm	PUV-32-15	PUO-32-15	PUB-32-15	PUG-32-15	PUA-32-15
1800mm	PUV-32-18	PUO-32-18	PUB-32-18	PUG-32-18	PUA-32-18
2000mm	PUV-32-20	PUO-32-20	PUB-32-20	PUG-32-20	PUA-32-20


OPTION GROUNDING SUPPORT



3 male pressures
10mm

MODULES COMPATIBLE WITH ALL CONSOLES


PRISE RECHARGE USB-C

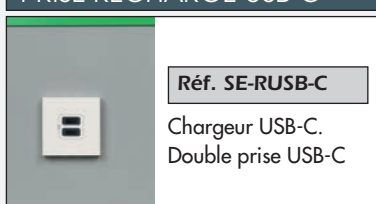

Ref. SE-RUSB-C

Chargeur USB-C.
Double prise USB-C


USB CHARGER MODULE

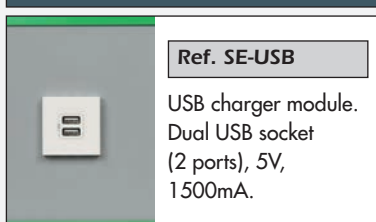

Ref. SE-USB

USB charger module.
Dual USB socket
(2 ports), 5V,
1500mA.


HDMI SOCKET

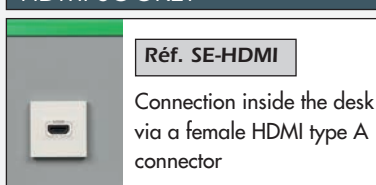

Ref. SE-HDMI

Connection inside the desk
via a female HDMI type A
connector


2 RCA FEMALE SOCKET

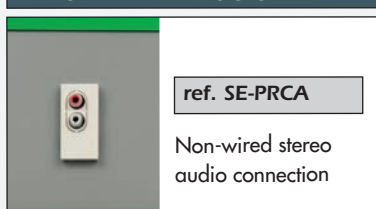

ref. SE-PRCA

Non-wired stereo
audio connection


24VDC / 4.2A

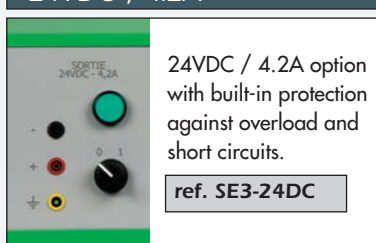

24VDC / 4.2A option
with built-in protection
against overload and
short circuits.

ref. SE3-24DC


230V SOCKETS (2 X 3PC)

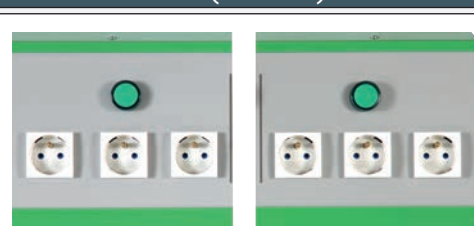

ref. SE6PC

Module with 2 x 3 power sockets 230V + lamp.

230V SOCKETS (2 X 2PC)

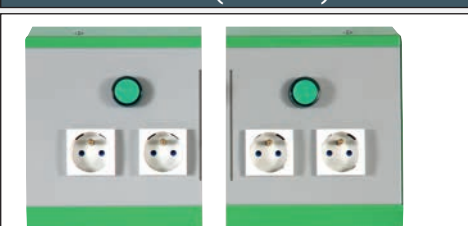

ref. SE4PC

Module with 2 x 2 power sockets 230V + lamp.


MEASURED POWER SOCKET



ref. SEPCW

Output on power socket 2P+E with wattmeter
direct display of consumed power.
Measuring apparatus: 10000 pts
Maximum power: 3500W
Protection by circuit breaker on the front panel


INVERTER PLUG



Ref. SE-UPS

Not wired


230V SOCKET



ref. PRISE+

230V socket
2P + E

RJ45 NOT WIRED PLUG

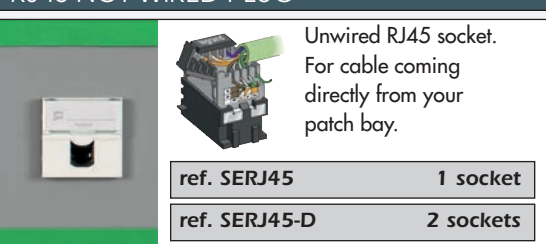

Unwired RJ45 socket.
For cable coming
directly from your
patch bay.


ref. SERJ45

1 socket

ref. SERJ45-D

2 sockets

RJ45 WIRED PLUG

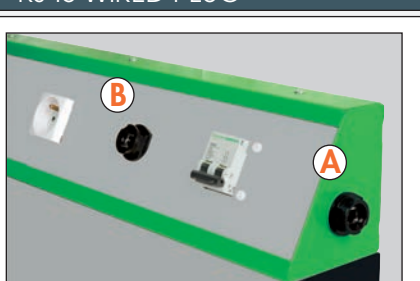

ref. CARJ45

Combination of 2 RJ45 connectors connected
together in the console. The side connector
A is used to connect the network input,
the front connector B is for the user's connection.

MODULES COMPATIBLE ONLY WITH CONSOLES PU(*)

OBLIGATORY MAIN MODULES: CHOOSE ONE OF THESE 4 REFERENCES



without on/off key control

ref. SE1MA-LV
3-phase mains supply

ref. SE1MA-MONO-LV
single-phase mains supply




with on/off key control

ref. SEMC-LV
3-phase mains supply

ref. SEMC-MONO-LV
single-phase mains supply


3-PHASE ON TERMINALS

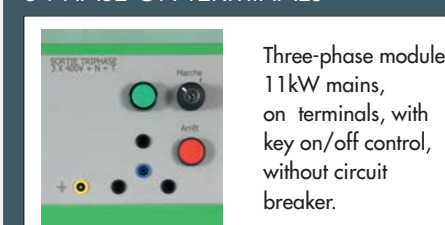

ref. SE7TR

Three-phase module
11kW mains,
on terminals, with
key on/off control,
without circuit
breaker.


3-PHASE ON SOCKET

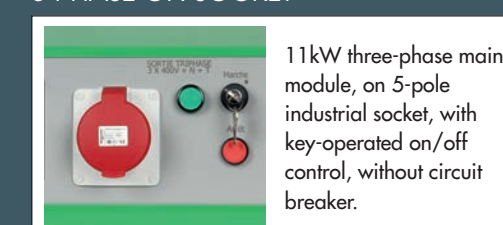

ref. SE7PCTR

11kW three-phase mains
module, on 5-pole
industrial socket, with
key-operated on/off
control, without circuit
breaker.

3-PHASE HYPRA SOCKET 16A

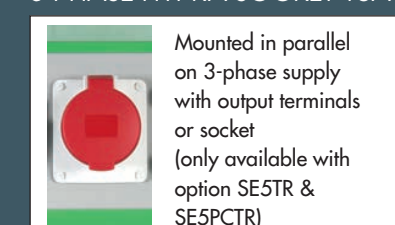

ref. HP4

Mounted in parallel
on 3-phase supply
with output terminals
or socket
(only available with
option SE5TR &
SE5PCTR)

ADJUSTABLE CONTINUOUS POWER SUPPLY



ref. R3005

DC power supply
with adjustable
voltage 0-30V
DC/0-5A


MEASURING CENTER



ref. SE-CMB

Measuring center option for high profile
power console. Communication interface
via a RJ45 port (cable not
supplied). Technical data available on
a computer via a WEB page.
Power supply and measuring security
terminal protected by fuses.
Maximum measuring current 20AAC
Maximum measuring voltage 500VAC

POWER SUPPLY -15VDC +15VDC 3A

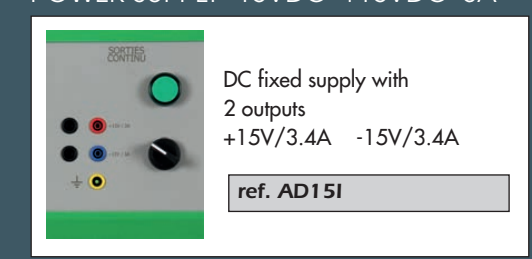

DC fixed supply with
2 outputs
+15V/3.4A -15V/3.4A


ref. AD15I

RESIDUAL CURRENT CIRCUIT BREAKER

30mA protection at the front.
Useful only if the room is not equipped
with this device.


ref. DIF30-4VJLV A type (3-phase)

ref. DIF30-2VJLV A type (single-phase)

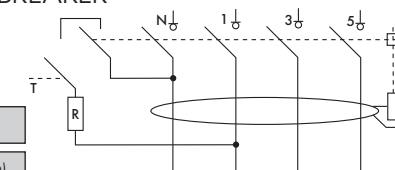


SHELVES

HIGH SHELF WITH ONE LEVEL

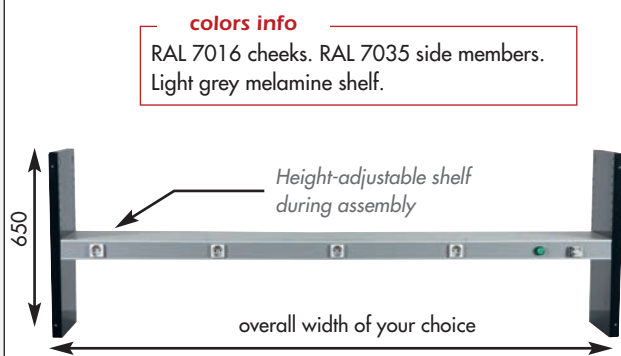


colors info	
RAL 7016 cheeks. RAL 7035 side members. Light grey melamine shelf.	
Lenght	4 sockets Thermal magnetic CB
overall	Ref.
1200mm	L1G-120
1500mm	L1G-150
1800mm	L1G-180
2000mm	L1G-200
Lenght	4 sockets 30mA resident current CB
overall	Ref.
1200mm	L1G-120D
1500mm	L1G-150D
1800mm	L1G-180D
2000mm	L1G-200D
Lenght	4 sockets Without plug
overall	Ref.
1200mm	L1G-120SD
1500mm	L1G-150SD
1800mm	L1G-180SD
2000mm	L1G-200SD
Lenght	Without plug
overall	Ref.
1200mm	L1G-120N
1500mm	L1G-150N
1800mm	L1G-180N
2000mm	L1G-200N

HIGH SHELF WITH TWO LEVELS

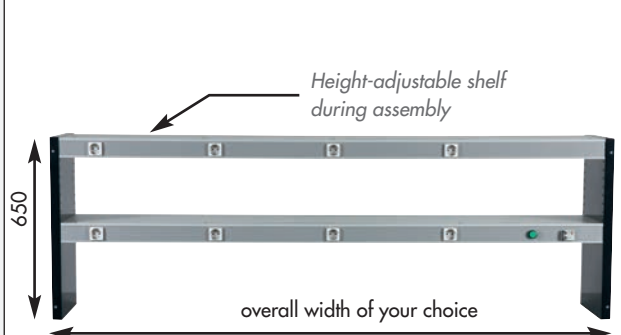

Lenght	8 sockets Thermal magnetic CB
overall	Ref.
1200mm	L2G-120
1500mm	L2G-150
1800mm	L2G-180
2000mm	L2G-200
Lenght	8 sockets 30mA resident current CB
overall	Ref.
1200mm	L2G-120D
1500mm	L2G-150D
1800mm	L2G-180D
2000mm	L2G-200D
Lenght	8 sockets Without plug
overall	Ref.
1200mm	L2G-120SD
1500mm	L2G-150SD
1800mm	L2G-180SD
2000mm	L2G-200SD
Lenght	Without plug
overall	Ref.
1200mm	L2G-120N
1500mm	L2G-150N
1800mm	L2G-180N
2000mm	L2G-200N

LOW SHELF WITH ONE LEVEL

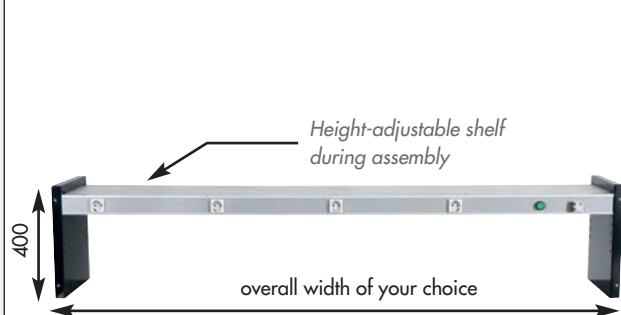

Lenght	4 sockets Thermal magnetic CB
hors tout	Ref.
1200mm	TBG-120
1500mm	TBG-150
1800mm	TBG-180
2000mm	TBG-200
Largeur	8 sockets 30mA resident current CB
hors tout	Ref.
1200mm	TBG-120D
1500mm	TBG-150D
1800mm	TBG-180D
2000mm	TBG-200D
Largeur	4 sockets Without plug
hors tout	Ref.
1200mm	TBG-120SD
1500mm	TBG-150SD
1800mm	TBG-180SD
2000mm	TBG-200SD
Largeur	Without plug
hors tout	Ref.
1200mm	TBG-120N
1500mm	TBG-150N
1800mm	TBG-180N
2000mm	TBG-200N

Thickness of uprights: 35 mm / Depth of shelves: 400 mm / Height adjustable level | Accepted load 200kg.



LIGHTING OPTION

LED lighting for high shelf single level type L1G. On/Off switch.

Lenght	Ref.
1200mm	ET-LED12
1500mm	ET-LED15
1800mm	ET-LED18
2000mm	ET-LED20

CHEST SHELF



ref. C3G-20

This storage solution offers a large, unpartitioned interior space. The uprights are fixed to the top of your workbenches. The two doors, 750mm wide by 400mm high, lock with a key. (2 identical locks). This chest made of aluminum profile is covered with black extruded PVC plates. It supports a total load of 100kg.

- Delivered assembled
- Total height: 1000mm
- For 2000mm workbench
- Interior space: H426 x D400 x L1920mm
- Available height between the top of the workbench and the bottom of the cabinet: 510mm.

Other dimensions or sliding doors without locks on request. Do not hesitate to contact us.

LED LIGHTING ON THE STEM



Horizontal ramp containing high-brightness LEDs distributed along the length. Mounted on a bracket, the ramp is located approximately 2 meters from the ground. We adapt this type of lighting according to the ergonomics of the workstation you have selected.

- Tilting ramp.
- Power supply 230VAC-50/60Hz.
- On/Off switch.
- High brightness LEDs.
- Structure in Ø 30mm aluminum tube.

1200mm LED ramp

ref. POTLED-1215

1800mm LED ramp

ref. POTLED-1820

CHOOSE YOUR COMPUTER ITEMS

ECONOMICAL CPU TOWER HOLDER



Matt aluminium profile CPU holder to be installed under a table. It's equipped with a sliding system for attaching the CPU regardless of its height.
Max. Height: 460mm
Max. Width: 210mm

ref. SU-INF

CPU TOWER HOLDER



Holder is screwed under the bench. Users have easy access to cable connections and drives. Sturdy and economical, this device ensures that the CPU tower is stored tidily and protected against theft.

- 45 x 45mm wire mesh
- 50mm front locking bar
- Attached with lag screws (supplied)
- EPOXY paintwork.
- Steel sheet base plate.



Ref.	Total height interior	Width interior	Depth interior
IFG-ECO	500mm	245mm	500mm
IFG-MINI	400mm	195mm	400mm
IFG-HORI	150mm	400mm	400mm

SLIDING KEYBOARD/MOUSE SHELF UNDER THE TOP



Sliding shelf system with adjustable locking mechanism for keyboard and mouse.
Gray and black shelf.

ref. IFG-TAB2

SUPPORT KEYBOARD/MOUSE



Instantly clings to the side of our CPU holders references IFG and IFG-ECO-MINI.
Installation without tools or screws.

ref. IFG-CLA

POWER SOCKETS UNIT FIXED UNDER THE TOP



Ramp hidden under the top
• 3 standard sockets 2P+E
• 1 RJ45 to be connected

ref. LGS-4


FLAT SCREEN SUPPORT UP TO 8 KG



FEATURES

- For flat screen monitors weighing up to 8kg
- 5 rotation points on 4 ball joints
- Arm lengths of 250mm and 180mm
- Attached to edge of table by locking pliers with a tightening screw for a table thickness between 15 and 100mm. The attachment consists of a 400mm high support pole fitted with a sliding ball joint to adjust the height of the screen.
- Built-in cable guide
- Supplied with 4 screws for the monitor.

ref. VES-502

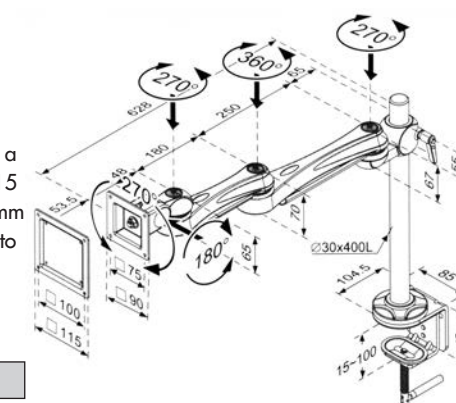

FLAT SCREEN SUPPORT UP TO 9 KG



- For screens from 2 to 9 kg up to 32"
- VESA 75 or VES 100 mounting plate
- 5 rotation points on 3 ball joints
- Arm height from 160 to 410 mm
- Fixing on the edge of the table by vice clamp with tightening screw for tables between 10 and 85 mm thick, or on the desk through a through hole.
- Mounting screws, screen screws and tightening tool included
- Integrated cable guide

ref. VES-153

OPTION RACEWAY THROUGH THE BENCH TOP



- Optional raceway through the bench-top
- Factory assembly only

ref. PASS-70

INDUCTIVE CHARGER OPTION

For fast charging of a Smartphone equipped with an induction receiver by simply placing it on a base.
Non-slip surface. Extra thickness above the plate of 3mm, Ø 87mm.
Factory assembly only.

ref. SE-CHR



RECESSED POWER STRIP WITH USB CHARGING SOCKETS

Retractable power strip, compatible with cable gland option

- 3x 2P+T sockets (230VAC 16A max)
- 2x USB type A ports (5VDC - 2.4A total max)
- Main switch with red indicator light
- 1.80m power cord length
- Ø60 mm recessed - 45mm thick max
- Certification: CE



- Dimensions: Ø60 mm x 375mm
- Weight: 2kg

ref. MULTP-F-2USB

OPTIONS FOR WORKBENCHES

360° LIGHT SIGNAL TOWERS



Beacon with a red light indicator (voltage presence) Ø60mm

ref. VOY61

Beacon with 2 light indicators: red and green Ø60mm

ref. VOY121



COLORS AVAILABLE UPON REQUEST
white - orange - red - green - blue



HARD-WEARING LED LAMPS



Beacon with 3 light indicators: red, yellow and green Ø60mm

ref. VOY181


CABLE RACEWAY

For the wiring of the power cable from the aerial wiring system to the base of the power supply

ref. DEG-1

Model for power cable and network cable

ref. DEG-2

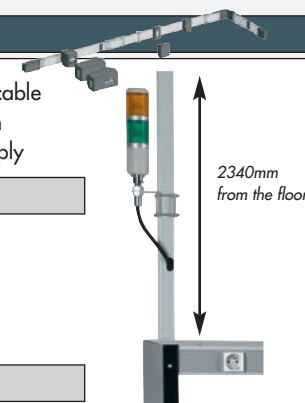


ANTIVANDALISM COVER

This pull-down cover in front of the electrical equipment in the console prevents students from scribbling on or vandalising the front and its equipment.
Standard dimensions: 1200mm and 2000mm. **Other dimensions upon request.**

ref. VSG-12



COMPUTER WORKSTATION FOR PRACTICAL WORKS

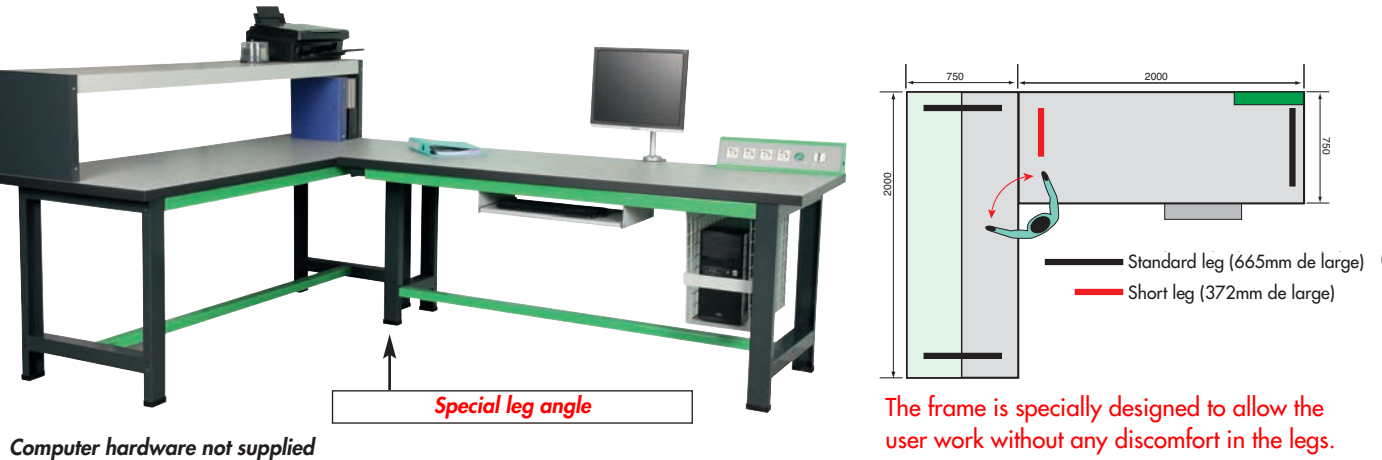

Computer hardware not supplied

Ref. RAL 6018	TXV-40
Ref. RAL 2008	TXO-40
Ref. RAL 5017	TXB-40
Ref. RAL 7035	TXG-40
Ref. RAL7016	TXA-40

This bench is a comfortable and spacious unit for tutorials which require the use of computers and measuring equipment. With a side shelf, a mini-console and special equipment to accomodate all the computer elements. This bench is very convenient to use.

COMPONENTS AND FEATURES OF THE STATION

- Two 40mm high-temperature stratified tops with PVC edges
- 1 “cage”-type CPU tower holder with anti-theft bar at the front.
- 1 sliding keyboard/mouse holder
- 1 base with furnace-baked epoxy paint, vertical support leg and footrest bar.
- **Base suitable for rotation.**
- 1 mini-console fitted with 4 power sockets 230V + circuit breaker + LED lamp
- 1 shelf fitted with 4 power sockets 230V + circuit breaker at the back + LED lamp
- Height of the working surface: 840mm (top included)
- A very large work surface

BASIC COMPUTER WORKSTATION

COMPONENTS AND FEATURES OF THE STATION


- 1 “cage”-type CPU tower holder with anti-theft bar at the front (500 x 500 x 245 mm).
- 1 base with 2 H legs and 3 crossbars including a footrest
- 1 console fitted with 6 sockets + circuit breaker (*) + LED indicator light
- 1 hidden console underneath the bench with 3 230V sockets + RJ45 Ethernet socket
- Shelf adjustable in height
- Max height : 400mm. Depth : 400mm. Length : 1200mm.
- Height of the bench (shelf included) : 1240mm
- Height of the tabletop : 840mm (tabletop included)
- Very large area of work



Computer hardware not supplied

Dims. (mm)	Ref. RAL 6018	Ref. RAL 2008	Ref. RAL 5017	Ref. RAL 7035	Ref. RAL7016
1800 x 750	TXV-187	TXO-187	TXB-187	TXG-187	TXA-187
1800 x 1000	TXV-1810	TXO-1810	TXB-1810	TXG-1810	TXA-1810
2000 x 750	TXV-207	TXO-207	TXB-207	TXG-207	TXA-207
2000 x 1000	TXV-2010	TXO-2010	TXB-2010	TXG-2010	TXA-2010

(*) Thermal-magnetic circuit breaker in standard, residual current type upon request.

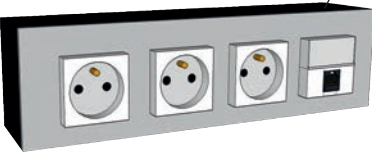

Hidden power console underneath the tabletop

- 3 standard sockets 2P+E
- 1 RJ45 Ethernet socket (not wired)

INDUSTRIAL COMPUTER TROLLEYS



Dessertes informatiques de type industriel, idéal pour le travail en atelier.

Dimensions (mm)	750 x 670 H965mm	1500 x 750 H965mm
Ref. RAL 6018	RSV-INF	RSV-INF2
Ref. RAL 2008	RSO-INF	RSO-INF2
Ref. RAL 5017	RSB-INF	RSB-INF2
Ref. RAL 7035	RSG-INF	RSG-INF2
Ref. RAL7016	RSA-INF	RSA-INF2

Computer hardware not supplied

- High-temperature stratified bench-top 40mm thick PVC bench-top edges
 - Cage type CPU holder with anti-theft bar at the front.
 - A sliding keyboard/mouse holder in the corner
 - 1 complete stand (epoxy paint) including:
 - Two single H type feet
 - 3 cross rails including 1 foot rest
 - 4 casters Ø100mm including 2 with brakes
 - Height top included 965mm
 - 1 flat screen support arm
 - Table edge attachment between 15 and 100mm thick.
 - 400-mm high pole, fitted with sliding ball joint.
 - Built-in cable guide.
- Supplied with 4 screws for the screen.
For flat screens up to 12 kg. 3 rotation points on 2 ball joints.
Sliding ball joint for screen height adjustment.

PROFESSIONAL QUALITY

Basement guarantee

5 years

Accepted load



Startified top



www.langlois-france.com

Additional computer accessories
See P1-34



COMPUTER WORKBENCH WITH TOP SHELF

Great stability, no side movement thanks to horizontal aluminium profiles with cross-section 80x40mm and four feet 40x40mm with plastic pads. Supplied with assembly instructions. Very simple and quick to assemble by one person.

- Grey stratified worktop 19mm thick.
- Table height without shelf 760mm (worktop included).
- 2 CPU supports, dimensions 400 x 400 x 195mm.
- Shelf dimensions H 650mm x D 400mm x W 1800mm. equipped with 4 sockets with indicator light and circuit-breaker.
- Matt anodized aluminium stand.
- Lasting protection against corrosion.
- 300kg load distributed on the surface (max).

Dimensions (mm)	Ref.
1800 x 670	TXG-1867
2000 x 670	TXG-2067




COMPUTER WORKBENCH WITH ROTATING SHELF

Great stability, no side movement thanks to horizontal aluminium profiles with cross-section 80x40mm and four feet 40x40mm with plastic pads. Supplied with assembly instructions. Very simple and quick to assemble by one person.

- Grey stratified worktop 19mm thick.
- Bench height 760mm (worktop included).
- CPU support dimensions 500 x 245mm.
- Two-level shelf, pivoting 315°.
- Dimensions of each level 750 x 280mm.
- 4 sockets 2P+E under the bottom level.
- Matt anodized aluminium stand.
- Lasting protection against corrosion.
- 300kg load distributed on the surface (max).

Dimensions (mm)	Ref.
1800 x 670	EIG-1867
2000 x 670	EIG-2067

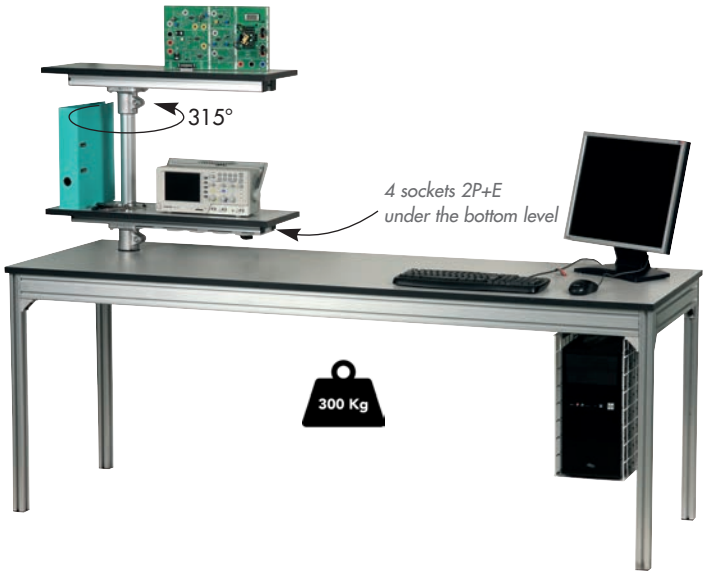

COMPUTER TABLES

High stability for these tables made of aluminum profiles. 4 feet 40 x 40mm with plastic pads. Supplied with assembly instructions. Simple and quick to assemble by one person.

- Gray melamine top 19mm thick.
- Workbench Height 760mm (Table-top included).
- CPU holder dimensions 500 x 245mm.
- Matte anodized aluminum base.
- Durable protection against corrosion.
- Load 70kg distributed on the surface.

Dimensions (mm)	Ref.
1000 x 670	TTGI-1067
1200 x 670	TTGI-1267
1400 x 670	TTGI-1467
1800 x 670	TTGI-1867
2000 x 670	TTGI-2067



ELECTRICALLY ADJUSTABLE COMPUTER DESK



3 x 230V sockets (2P + E) and 1 RJ45 socket placed under the rotating shelf



ref. TAB-EL-INF2

- Electrically adjustable height with electric control
- Adjustable from 720 to 1080mm (Tabletop included)
- 4 memory positions
- 2 Up and Down directional buttons
- 40mm thick gray stratified top.
- C-shaped metal base with integrated motors.
- 250kg load distributed over the surface.
- Shelf 750 x 280mm 350 ° rotating with socket block fixed under the shelf.
- PU holder under the tray.
- Cable grip on tray.
- Electric ramp consisting of:
 - 7 2P + T 230V sockets
 - 1 16A magnetothermal circuit breaker
 - 1 LED on.



Electrical control under the bench. 4 memorizable positions digital display.

COMPUTER TROLLEYS

Computer hardware not supplied



Computer trolley with casters equipped with three shelves of grey melamine 19mm and one magnetic plate for easy attachment of your work documents. All the parts are height adjustable.

- Frame made of matt aluminium sections.
- 1 shelf of grey melamine 750 x 400 mm.
- 2 shelves of grey melamine 500 x 400 mm.
- 1 magnetic plate.
- 1 support for flat screen.
- 1 microprocessor unit support.
- Dimensions hors tout : H1840mm - L750mm - P500mm

ref. DES-INF1

Computer trolley with casters equipped with three shelves of grey melamine 19mm and one screen support arm. All the parts are height adjustable.

- Frame made of matt aluminium sections.
- 1 shelf of grey melamine 750 x 400 mm.
- 2 shelves of grey melamine 500 x 400 mm.
- 1 microprocessor unit support.
- 1 flat screen articulated arm.
- Frame dimensions (without arm): H1150 - W750 - D500 mm

ref. DES-INF2

Computer hardware not supplied






LABTOP CHARGING CABINET

This locker cabinet is specially designed for safely recharging 10 computers portable simultaneously.

- 10 lockers (280 x 480 x H260mm) locking.
- Each locker is equipped with a 2P + E mains socket.
- Extruded plastic walls and doors.
- Dimensions: L 700 x D 560 x H 1700mm.

The cabinet is delivered with a 3 meter power cord.

ref. ARPC-10

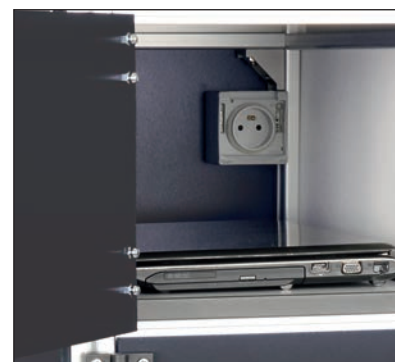

COMPUTER CABINET WITH ROLLING SHUTTER

Tall computer cabinet fitted with an electric shutter with key control.

With 2 high melamine shelves 750x400mm, a sliding keyboard and mouse support shelf and a central unit support, this wardrobe is a real computer workstation!

Once the shutter is closed, your IT equipment and documents are perfectly protected.

- Matt anodized aluminum structure
- Lightweight walls
- 1 low shelf for a central unit and printer.
- 1 sliding keyboard and mouse shelf.

This shelf is equipped with a cable pass and a strip of 4 sockets 230V- 2P + E.

- 1 flat screen support (VESA).
- 1 high shelf (ref ARM-INF2)
- 2 high shelves (ref ARM-INF1)



Dimensions (mm)	Réf.
2100 x 900 x 570	ARM-INF2
2400 x 900 x 570	ARM-INF1

MAINTENANCE STATION

- 1 laminated worktop, 750mm deep (worktop height: 840mm)
- 1 shelf, 280mm deep, height-adjustable
- 1 wall-mounted 3-drawer cabinet (free placement)
- 2 tool holders, height-adjustable
- 1 workbench-compatible, height-adjustable work light
- 1 control panel equipped with: 1 16A C-curve circuit breaker, 1 emergency stop, 6 power outlets,

2 RJ45 sockets, 1 charger with 2 USB-A ports


- 1 8-outlet 2P+E (Type E) power strip
- 2 anti-static mats, 700x1000mm, with push-button connection cords (50cm to 2.5m)
- 2 anti-static wrist straps with push-button connection cords (50cm to 2.5m)
- 2 ESD grounding brackets with 3 push-button connections

Cable 230V mains power supply – 2P+E not included.

Delivered unassembled, with simple assembly instructions.

Equipment must be connected to a 30mA residual current device (RCD).

Available in several colors upon request.

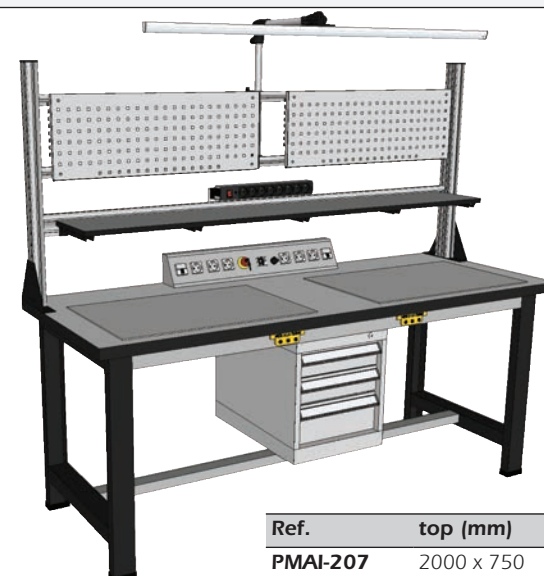

Ref.	top (mm)
PMAI-207	2000 x 750
PMAI-187	1800 x 750
PMAI-157	1500 x 750

COWORKING SPACE FOR 2 TO 12 PEOPLE

COWORKING SPACE UP TO 12 PEOPLE


Working surface 2500 x 2500mm in 40mm stratified grey
Height of worktop 760mm.

Delivered pre-assembled for installation

- baseframe made of matte anodized aluminum
- Melamine worktop, gray, 40mm thick
- 4 power consoles (green body/front gray PVC) with, in each:
 - 2 230V 2P+E plugs
 - 2 RJ45 plugs
 - 1 LED light

One of the panels is equipped with a magnetothermal circuit breaker which protects all 8 plugs.

- 1 cable race away (2,5m)
- 1 melamine central shelf in the middle of the power consoles.

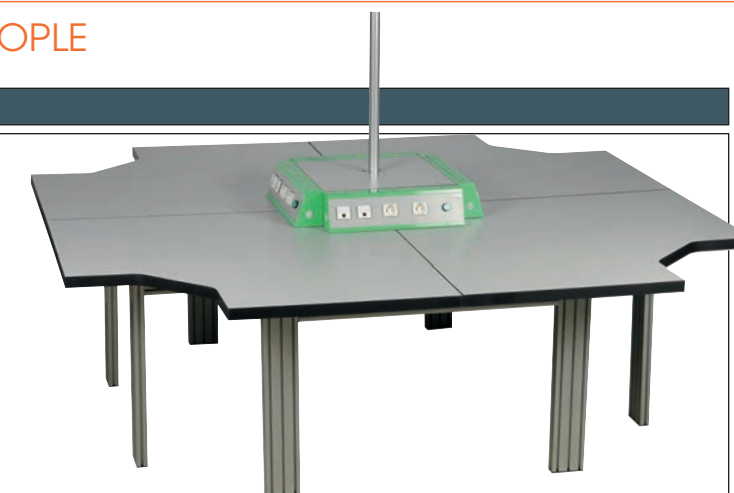

ref. COWORK-2525



Version without power console

ref. COWORK-2525SP

COWORKING SPACE 4 TO 8 PEOPLE - WITH CABINETS



Coworking space for 4 to 8 people. Working surface 2000 x 2000mm.
Height of worktop 760mm. Delivered pre-assembled for installation

- baseframe made of matte anodized aluminum
- Melamine worktop, gray, 40mm thick
- 4 power consoles with, in each:
 - 3 230V 2P+E plugs
 - 1 RJ45 plugs

- 1 melamine central shelf in the middle of the power consoles. (560 x 760mm).
- 4 hanging drawers: 2 of 100mm and one of 300mm of height (others hanging drawers upon request).

ref. COWORK-2020C

COWORKING SPACE 4 TO 8 PEOPLE



ref. COWORK-2020

Coworking space for 4 to 8 people.

Working surface 2000 x 2000mm in 40mm stratified grey
Height of worktop 760mm. Delivered pre-assembled for installation

- baseframe made of matte anodized aluminum
- 40mm grey stratified top
- 4 power consoles with 4 x 230V 2P+E plugs
- 1 melamine central shelf in the middle of the power consoles.

COWORKING SPACE 2 TO 4 PEOPLE



ref. COWORK-2512

Coworking space for 2 to 4 people.

Working surface 1200 x 2400mm in 40mm stratified grey
Height of worktop 760mm. Delivered pre-assembled for installation

- baseframe made of matte anodized aluminum
- 40mm grey stratified top



ref. BPV-1522 RAL6018
ref. BPO-1522 RAL2008

TOOL AND TRAY HOLDERS BENCHES

Bench with tool holder vertical panels and tray rests.
High temperature stratified top (40mm).
Height of the bench : 840mm (top included).
Top : 1500 x 750mm
Height of the vertical panels : 830mm
Total height of the bench : 1670mm
A PVC protective pad is placed underneath each foot

Description of the delivered components	Quantity
1500x750mm stratified bench	1
Tool holder panel	2
Tool holder hook	24
Screwdrivers holder	1
Tray holder panel	2
125 x 105mm tray	6
125 x 75mm tray	6
Adjustable shelf (in height)	1

Others configurations available upon request. Contact us.



Single sided version ref. CHPT1

TOOL AND TRAY HOLDERS TROLLEY

- 4 steering castors for ease of use of movement, including 2 with brakes.
- MAT anodized aluminum structure.

Single sided version

- 2 perforated tool-holder panels
- 1 bin-holder louver panel
- 1 shelf
- Height = 1550mm
- Width = 890mm
- Depth = 500mm

Ref. CHPT1

Double sided version

- 4 perforated tool-holder panels
- 2 bin-holder louver panels
- 2 shelves
- Height = 1550mm
- Width = 890mm
- Depth = 900mm


Ref. CHPT2

TOOL AND TRAY HOLDER BENCHES WITH ELECTRICAL HEIGHT ADJUSTMENT


Workbench composition

- An electric height-adjustable workbench from 720 to 1080mm (top/floor), with a configurable control console (4 memory settings +/- height buttons).
- 1800 x 750mm stratified top, 40mm thick.
- Power supply console (RAL 7035) with 6 2P+E power sockets, 1 thermal-magnetic circuit breaker, and 1 LED indicator.
- 3-drawer hanging cabinet: 2 x 90mm + 1 x 140mm high. Each drawer is equipped to create 8 compartments. Lock with 2 keys provided.
- 2 tool panels for a surface area of 1700 x 300mm
- 2 bin-holder panels for a surface area of 1700 x 300mm

Panel supports height 860mm from the top surface.
Maximum load: 180 kg distributed over the surface of the tabletop and panels.
Electric table connected and protected by a circuit breaker in the desk.
3 m 230 V mains power cable with a 2P+E plug provided.
Delivered unassembled with very simple assembly instructions.
Equipment must be connected to a 30 mA residual current device.

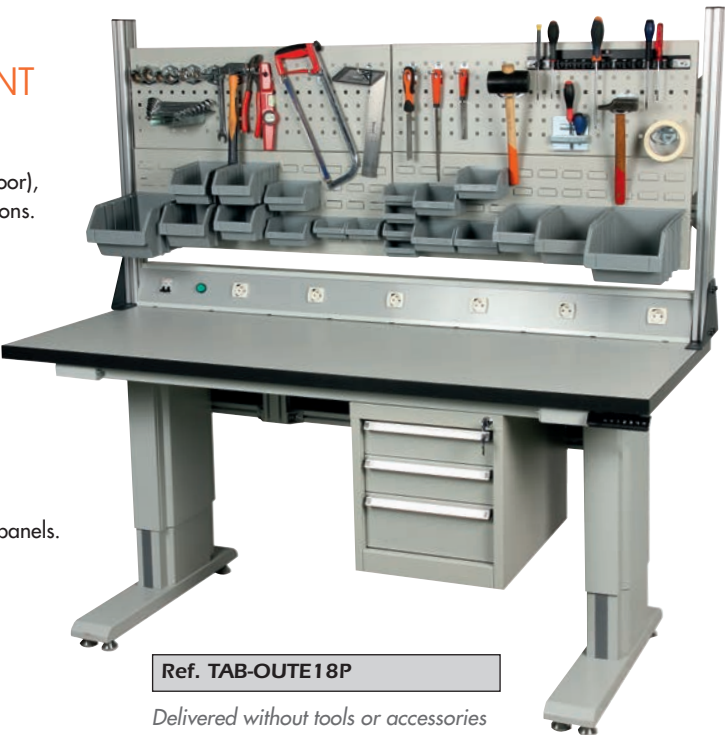

Ref. TAB-OUTE18P
Delivered without tools or accessories

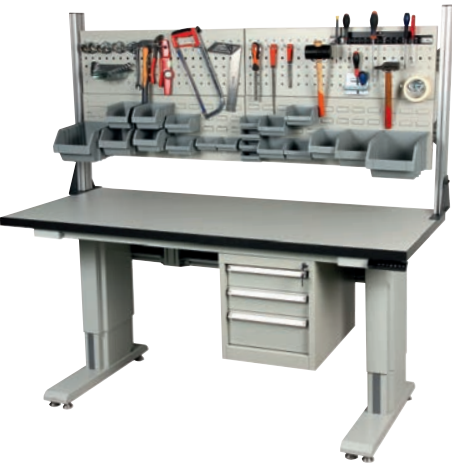

Version without power supply console
Ref. TAB-OUTE18
Delivered without tools or accessories

OPTIONAL ACCESSORIES

See page 49



TOOL AND TRAY HOLDER BENCHES WITH MANUALLY ADJUSTABLE HEIGHT

Workbench composition

- A manually height-adjustable table with an ergonomic retractable handle. From 780 to 1100 mm (top/floor).
- 1800 x 750 mm stratified top, 40 mm thick
- Power supply console (RAL 7035) with 6 2P+E power outlets, 1 thermal-magnetic circuit breaker, and 1 LED indicator.
- 3-drawer hanging chest: 2 x 90 mm + 1 x 140 mm high. Each drawer is equipped to create 8 compartments. Lock with 2 keys provided
- 2 tool panels for a surface area of 1700 x 300 mm
- 2 bin-holder panels for a surface area of 1700 x 300 mm

Panel support height 860 mm from the top surface.
Maximum load: 100 kg distributed over the surface of the tabletop and panels.
3 m 230 V mains power cable with a 2P+E plug is included.
Delivered unassembled with very simple assembly instructions.
Must be connected to a 30 mA residual current device (RCD) protection device.




Ref. TAB-OUTM18P
Delivered without tools or accessories



Version without power supply console
Ref. TAB-OUTM18
Delivered without tools or accessories

OPTIONAL ACCESSORIES

See page 49




VERTICAL PANELS FOR WORKBENCHES

These tool-holder panels attach to the back of any shelf with a thickness between 20 and 60 mm. The shelf overhang must be at least 45 mm for a secure hold. Attaching to the shelf requires no tools, as each vertical post is equipped with a screw with a tightening knob. The vertical tool-holder and bin-holder panels attach quickly and easily to the posts using 25 mm-pitch claws. Total height relative to the shelf: 830 mm. The shelves attach in the same way and can be attached between or in front of the overhanging panels.




SET NO. 2: WIDTH 890MM

Ref.	Panels	Post
PP02-11	1 tool-holder + 1 tray-holder	2
PP02-20	2 tool-holders	2
PP02-02	2 tray-holders	2
ETS-800	Shelf option	
PPLED-800	Lighting option	

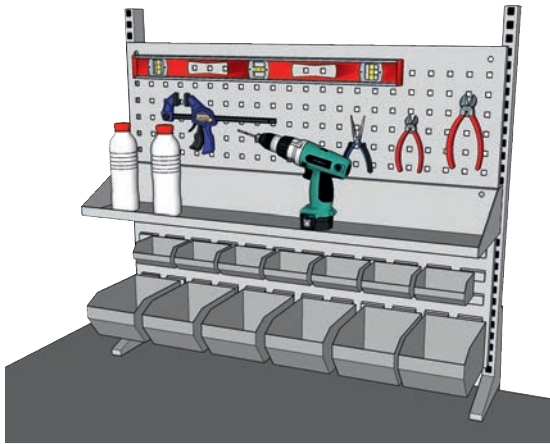


SET N°5: WIDTH 1750mm

Ref.	Panels	Post
PP05-22	2 tool-holder + 2 tray-holder	3
PP05-40	4 tool-holders	3
PP05-04	4 tray-holders	3
ETS-1700	Shelf option	
PPLED-1700	Lighting option	

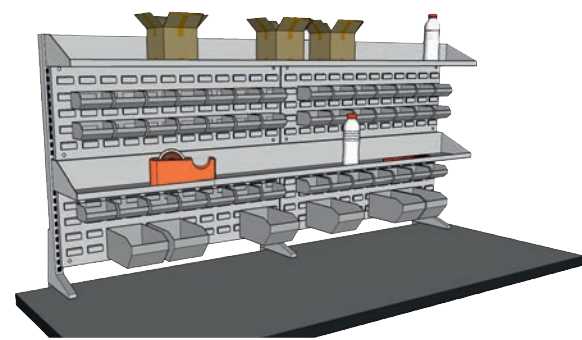


SET N°1: WIDTH 750mm

Ref.	Panels	Post
PP01-11	1 tool-holder + 1 tray-holder	2
PP01-20	2 tool-holders	2
PP01-02	2 tray-holders	2

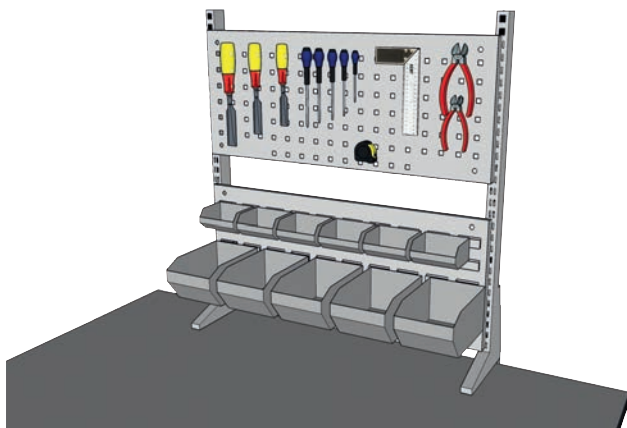


SET N°3: WIDTH 1050mm

Ref.	Panels	Post
PP03-11	1 tool-holder + 1 tray-holder	2
PP03-20	2 tool-holders	2
PP03-02	2 tray-holders	2

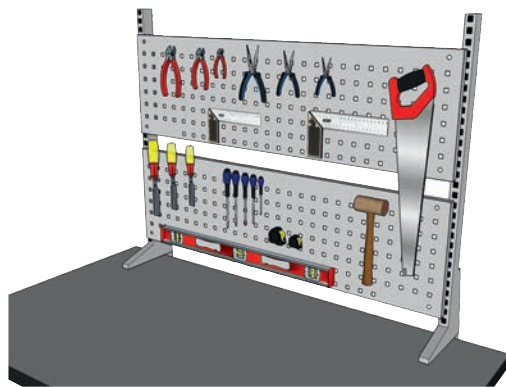

SET N°4: WIDTH 1470mm

Ref.	Panels	Post
PP04-22	2 tool-holder + 2 tray-holder	3
PP04-40	4 tool-holders	3
PP04-04	4 tray-holders	3
ETS-1400	Shelf option	
PPLED-1400	Lighting option	

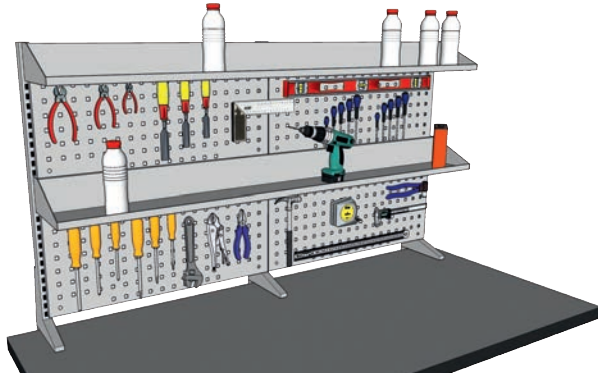

ACCESSORIES FOR TOOL-HOLDER PANELS

TOOL HOLDER COOK



ref. CPT 70mm utile

DOBLE TOOL HOLDER COOK




ref. ACCPO-MAR 70mm utile

SCREWDRIVERS HOLDER



ref. PTVIS

MAGNETIC TOOL HOLDER

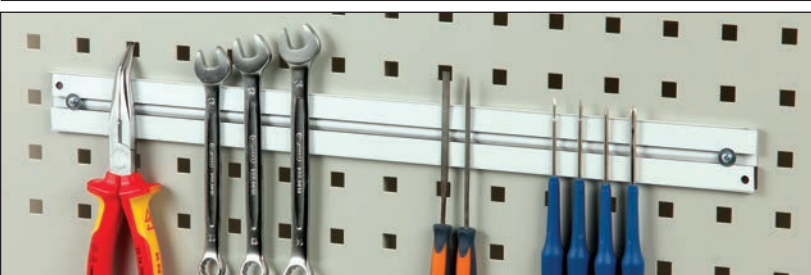

ref. ACCPO-AIM

FLAT KEY HOLDER



ref. ACCPO-CLE

ROUND TOOL HOLDER HOOK




ref. ACCPO-PER

U-SHAPED SUPPORT



ref. ACCPO-PCE

TRAYS

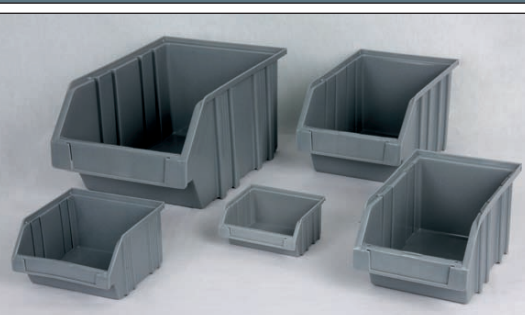

Ref BAB-1

Inside dimensions	70 x 90 x 45mm
Overall width	100mm

Ref BAB-2

Inside dimensions	105 x 115 x 70mm
Overall width	125mm

Ref BAB-3

Inside dimensions	170 x 105 x 90mm
Overall width	125mm

Ref BAB-4

Inside dimensions	190 x 105 x 115mm
Overall width	150mm

Ref BAB-5

Inside dimensions	262 x 175 x 140mm
Overall width	200mm

SUPPORT FOR TRAYS



Steel support. Supplied without fixing screws.

Ref BAB-SUP5 BAB-SUP10

Dim.	500mm	1025mm
------	-------	--------

HOLDER FOR 6-SIDED KEYS



ref. ACCPO-6P

WET BENCHES

Frame and worktop common to all versions

- Anodised aluminium frame equipped with 4 plugs for adjusting the level.
- Worktop 1500 x 750mm made of anticorrosion polypropylene with raised edge and basin 400 x 400 x H300mm. Injection moulded assembly. The edges are rounded off for better safety. Polypropylene provides excellent resistance to acids, alkalis and bases, which is ideal for chemistry laboratories. The surface is completely smooth and easy to clean. Equipped with a single tap 245mm high and offset 140mm. Siphon supplied.
- height of worktop 840mm

ref. PEV-157N Basin on the left

ref. PEV-157ND Basin on the right

ref. PEV-157NS without basin



ref. PEV-157C Basin on the left

ref. PEV-157CD Basin on the right

ref. PEV-157CS without basin



ref. PEV-157F Basin on the left

ref. PEV-157FD Basin on the right

ref. PEV-157FS without basin



ref. PEV-157P Basin on the left

ref. PEV-157PD Basin on the right

ref. PEV-157PS without basin



Version with drawer unit

- Frame and worktop
- Suspended unit with 4 drawers 100mm. The drawers are mounted on ball bearings so that they slide easily and silently. They are removable so that they can be switched around or sorted. The lock secures all of the drawers at the same time. Dimensions: P 665 x 450 x H 490mm


Cased version

- Frame and worktop
- Casing on 4 sides in panels of matt white expanded PVC 8mm, light and wet-proof.
- Without horizontal bottom.

Cased version with doors and shelf

- Frame and worktop
- 2 doors opening 170° equipped with plastic handles.
- 1 melamine shelf 500 x 400mm, raised 300mm.
- 1 melamine bottom 19mm.
- The 3 sides and the 2 doors are made of matt white expanded PVC.

WORKBENCHES - TROLLEYS

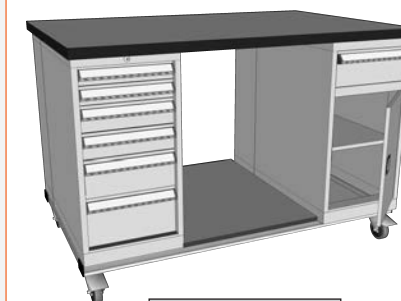

ref. DESCOF-1



ref. DESCOF-1ET

Common equipment

- 1 chest of drawers measuring h800 x w407 x d653mm. Equipped with 6 drawers: 2 x 60mm + 2 x 90mm + 1 x 140mm + 1 x 190mm high. Each drawer is equipped to create 8 compartments. Lock with 2 keys provided. Light grey.
- 1 chest measuring h800 x w407 x d653mm with door and drawer. Light grey. Door chest part fitted with a height-adjustable shelf. 1 Drawer 140mm high (equipped for 8 compartments).
- 1 laminated top 1500 x 1000mm x Ep40mm
- 4 directional wheels including 2 with brakes


Additional equipment on DESCOF-1ET :

- 1 tilting magnetic board measuring 900 x H800mm
- 1 electric ramp equipped with 4 2P+T sockets
- 1 LED lighting on height-adjustable stem.

Delivered assembled. Height under top 960mm.. With 3m cable and 2P+T mains plug (version -1ET)



ref. DESCOF-2

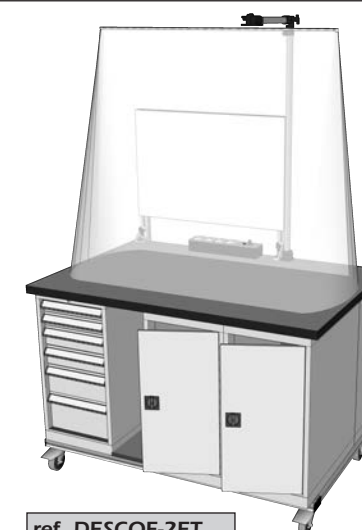

ref. DESCOF-2ET

Common equipment

- 1 chest of drawers measuring h800 x w407 x d653mm. Equipped with 6 drawers: 2 x 60mm / 2 x 90mm / 1 x 140mm / 1 x 190mm high. Each drawer is equipped to create 8 compartments. Lock with 2 keys provided. Light grey.
- 2 chests with doors, dimensions h800 x w407 x d653mm. 1 height-adjustable shelf. Lock with 2 keys provided.
- 1 laminated top 1500 x 1000mm x Ep40mm
- 4 directional wheels including 2 with brakes

Additional equipment on DESCOF-2ET :

- 1 tilting magnetic board measuring 900 x H800mm
- 1 electric ramp equipped with 4 2P+T sockets
- 1 LED lighting on height-adjustable stem.

Delivered assembled. Height under top 960mm. With 3m cable and 2P+T mains plug (version -2ET)

- 2 chests with lockable doors. Can contain an object of 800 x 500 x 300mm.
- 1 chest with 6 drawers including (5 x 100mm and 1 x 200mm).
- 1 stratified top with dimensions 1500 x 1000mm. Thickness 40mm.
- 1 electric ramp equipped with 4 sockets 2P + E
- 1 tilting magnetic board of dimensions 900 x 800mm
- 1 LED lighting with stem adjustable in height.
- 4 directional wheels, 2 with brakes

Delivered assembled with 3m cable and 2P + E mains plug

ref. DESCOF



- 4 chests of drawers measuring h800 x l407 x d653mm. Equipped with 6 drawers: 2 x H60mm / 2 x H90mm / 1 x H140mm / 1 x H190mm. Each drawer is equipped to create 8 compartments. Lock with 2 keys provided. Light grey.
- 1 wood top measuring 1680 x 750mm x Th40mm - Unvarnished.
- 4 directional wheels, 2 of which have brakes

ref. DESCOF-4C



WOODEN TRAY TROLLEYS



DES-16

Common features

- Trolleys with wheels.
- Steel tube structure.
- Beech effect melamine shelves.
- 2 swivel wheels Ø125mm with brakes.
- 2 fixed wheels Ø125mm.
- Delivered disassembled. Easy assembly.
- Dims L. 1030mm x W. 500mm x H. 1010mm.
- Useful dimensions 850 x 500mm.
- Shelf height 185/810mm.
- Top shelf load 80kg.
- Max load 200kg.

2-level trolley

- Removable top shelf.
- Shelf height 185/810mm.
- Weight 31kg.

ref. DES-16



DES-18

3-level trolley

- 2 removable shelves.
- Shelf height 185/500/810mm.
- Top shelf load 80kg.
- Middle shelf load 80kg.
- Weight 37kg.

ref. DES-18

3-LEVEL ALUMINUM TROLLEY



ref. DES-1050

- 4 wheels Ø100mm including 2 with brakes.
- Handle to pull or push the trolley.
- Max weight per level: 50kg
- Overall dimensions: 560 x 1170 x H895mm.
- Delivered assembled.

WORKSHOP TROLLEYS



ref. DES-24

- 2 swivelling wheels Ø200mm with brakes, 2 fixed wheels.
- Carrying handle
- 1 cabinet lockable by key (1 fixed shelf and 2 moveable).
- Dimensions L1200mm W700mm H915mm.
- Useful dimensions 1050 x 700mm.
- Max load of the upper shelf: 200kg.
- Max load of the shelves inside the cabinet: 30kg.
- Total max load: 500kg.



ref. DES-58

- 4 swivelling wheels Ø125mm, 2 with brakes.
- 2 cabinets lockable by key (1 fixed shelf and 2 moveable in each cabinet).
- Dimensions: L1120mm W650mm H910mm.
- Useful dimensions 1120 x 650mm.
- Max load of the shelves inside the cabinet: 30kg.
- Total max load 150kg.

TROLLEY WITH CHEST

- Aluminum profile frame on casters.
- 4 shelves in gray melamine 19mm depth 400mm. Adjustable height of each shelf. Max load 60kg.
- 1 chest of drawers (composition according to ref). Dimensions 490 x 450 x 550mm.
- 2 handles for easy movement.
- Overall dimensions: 1200 x 670 x 900mm.

Drawers	Ref.
4 x 100mm	DEST44
2 x 200mm	DEST42
100mm + 300mm	DEST40

Adjustable height shelf



WORKBENCH HEIGHT SERVING TROLLEY (840mm)

This trolley has a height of 840mm to perfectly match our standard workbenches. Very useful for effortlessly sliding any heavy product from one to the other.

- 3-level trolley, 2 of which have edges.
- Dimensions 750 x 500mm - Height 840mm.
- Upper laminated shelf 40mm thick. Max load 80kg
- Adjustable intermediate level, 19mm melamine shelf. Max load 50kg
- Lower level, 19mm melamine shelf (400 x 640mm). Max load 50kg
- 4 directional castors Ø100mm, 2 of which have brakes.
- Delivered assembled. Weight 39kg.



ref. DES-84

METAL SERVING TROLLEY



- Electrogalvanised steel frame
- 3 fixed shelves with 30mm edge
- Protective grooved rubber mat on the upper shelf
- Handle
- 4 swivel casters Ø80 mm (2 with brakes).
- Space between the shelves : 330mm
- Height : 850mm (wheels included)
- Width : 615mm
- Length : 900mm (handle included)
- Max load by shelf : 30 kg
- Net weight : 33 kg

ref. DDG-90

CABINET TROLLEY

- Equipped with 2 adjustable shelves
- 3 storage levels.
- Maximum load per level: 100 kg
- Rotating handle with lock on the right door.
- Single color: Pearl Gray
- 4 swivel casters Ø80 mm (2 with brakes).
- Height : 1070mm (wheels included)
- Width : 450mm
- Length : 900mm
- Weight: 46 kg.

ref. DES-PR38



MOUNTED CABINET ON WHEELS



- 2 drawers H60mm
- 1 drawer H140mm
- 1 drawer H290mm
- 4 castors Ø80mm (2 with brake).
- Anti-fall edge
- Dimensions: H 850mm x 450 x 580mm.

ref. CR-CSU700



- 1 drawer H 90mm
- 1 drawer H140mm.
- 4 castors Ø80mm (2 with brake).
- 19mm melamine shelf.
- Dimensions: H 610mm x 450 x 580mm.

ref. CR-CSU30



- 4 drawers height 100mm.
- 4 castors Ø80mm (including 2 with brake).
- 19mm melamine top 500 x 800mm.
- Total height 600mm.

ref. CR-TIG-40

TECHNICAL TROLLEYS

SINGLE TROLLEY 3 LEVELS



Height of each shelf is adjustable

- Frame made of matt aluminium sections on wheels, 2 with brakes.
- Three shelves of grey melamine 19mm, depth 400mm. Height of each shelf is adjustable. Max. load per shelf 60kg.
- Height 1550mm
- Depth 500mm
- Width according to version: 600 / 850 / 1100mm.

H x P x L	Ref.
1550 x 500 x 600mm	DEST1
1550 x 500 x 850mm	DEST2
1550 x 500 x 1100mm	DEST3

DOUBLE TROLLEY 3 LEVELS




Height of each shelf is adjustable

- Frame made of matt aluminium sections on wheels, 2 with brakes.
- Six shelves of grey melamine 19mm, depth 400mm. Height of each shelf is adjustable. Max. load per shelf 60kg.
- Height 1550mm
- Depth 900mm
- Width according to version: 600 / 850 / 1100 mm.

H x P x L	Ref.
1550 x 900 x 600mm	DEST11
1550 x 900 x 850mm	DEST22
1550 x 900 x 1100mm	DEST33

DOUBLE TROLLEY 5 LEVELS

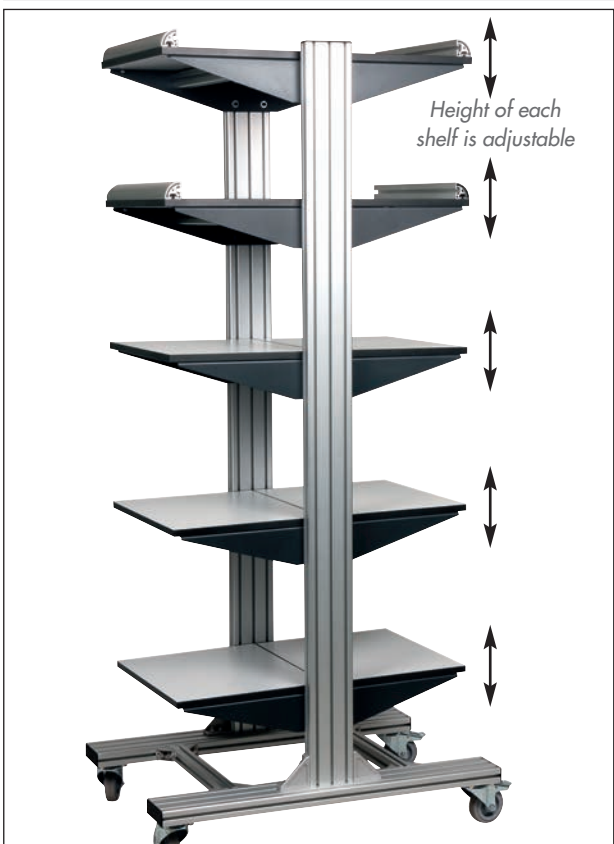

Height of each shelf is adjustable

- Frame made of matt aluminium sections on wheels (2 with brakes)
- Six shelves of grey melamine 19mm, depth 400mm. Height of each shelf is adjustable. Max. load per shelf 60kg.
- 4 shelves of grey melamine 19mm, depth 400mm. Max. load per shelf 25kg.
- Height 2000mm - Depth 900mm
- Width according to version: 670mm / 850mm / 1100mm.

H x P x L	Ref.
2000 x 900 x 670mm	DEST115
2000 x 900 x 850	DEST215
2000 x 900 x 1100	DEST315

ADJUSTABLE TROLLEYS - STANDARD OR INCLINABLE VERSIONS



Standard version not inclinable



Version inclinable

Adjustable from 850 to 1220mm.


- Frame made of matt aluminium sections on wheels, two with brakes.
- One shelf of grey melamine 19mm, depth 400mm. Max. load per shelf 60kg. Reclining from 0 to 65 ° (-I versions only)
- Adjustable height from 850 to 1220mm.
- Depth 510mm.
- Width according to version: 600 / 850 / 1100 mm.

	Standards version	Inclinables version
H x P x L	Ref.	Ref.
850 à 1220 x 510 x 600mm	DESTR1	DESTR1-I
850 à 1220 x 510 x 850	DESTR2	DESTR2-I
850 à 1220 x 510 x 1100	DESTR3	DESTR3-I


OPTION BLOCK 8 SOCKETS TO FIX

- Circuit breaker
- Light switch
- 2 meters of mains cable
- Power: 3680W

ref. PF80-F

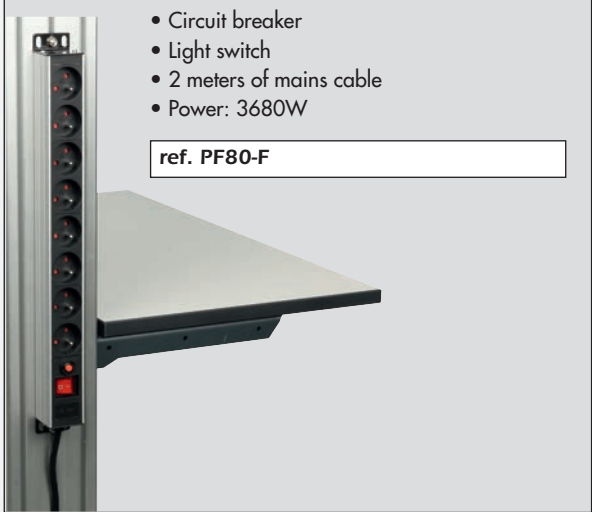

BINS

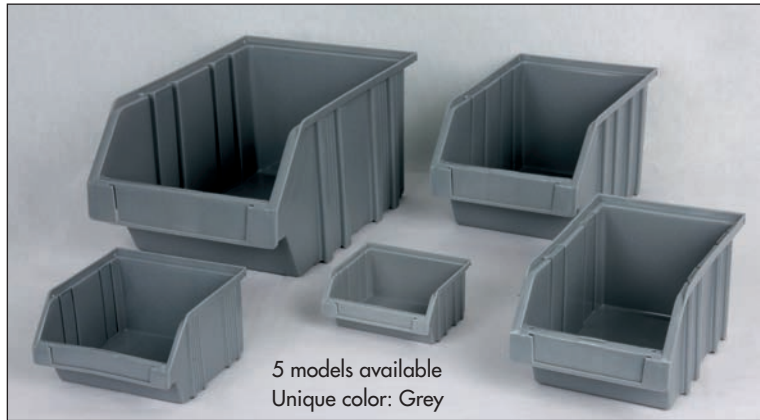

5 models available
Unique color: Grey

Ref	BAB-1	BAB-2	BAB-3	BAB-4	BAB-5
Dim.	70x90mm	105x115mm	175x105mm	195x130mm	265x175mm
Interior	P 45mm	P 70mm	P 95mm	P120mm	P 140mm
Lenght overall	100mm	125mm	125mm	150mm	200mm



Steel support. 2 lengths to choose from. Supplied without fixing screws.

Ref	BAB-SUP5	BAB-SUP10
Dim.	500mm	1025mm

TROLLEY WITH BINS

- 4 swivel wheels for an easy moving. 2 wheels have a brake
- Structure aluminium
- H 1100mm
- W 960mm
- D 610mm

84 grey plastic bins

- 42 bins of dimensions 105 x 115 x 70mm (21 front – 21 back)
- 42 bins of dimensions 175 x 105 x 95mm (21 front – 21 back)



ref. PB84R

TALL CABINETS



ref. HB58 supplied disassembled

ref. HB58-M supplied assembled

- **Width: 900mm - Height 1800mm - Depth: 450mm**
- Equipped with 4 height-adjustable shelves forming 5 storage levels.
- Max load per level: 100 kg
- Rotating handle with lock on the right door.
- Single color: Pearl gray (baked epoxy paint)
- Empty weight: 94kg



ref. HB69 supplied disassembled

ref. HB69-M supplied assembled

- **Width: 1100mm - Height 1900mm - Depth: 600mm**
- Equipped with 4 height-adjustable shelves forming 5 storage levels.
- Max load per level: 150 kg
- Rotating handle with lock on the right door.
- Single color: Pearl gray (oven-baked epoxy paint)
- Empty weight: 119kg

TALL CABINET WITH DRAWERS



- **Width 1100mm - Height 1900mm - Depth 600mm**
- 4 shelves load 150kg
- 1 drawer height 100mm + 1 drawer height 200mm
- Drawers with accessories necessary for creating compartments:
 - 5 central crosspieces per drawer
 - 10 compartmentalization plates per drawer
 - Label holder handle
 - Safety device for opening only one drawer at a time.
- Rotating handle with lock on the right door.
- Single color: Pearl gray (oven-baked epoxy paint)
- Empty weight: 154kg

ref. HBT691 supplied disassembled

ref. HBT691-M supplied assembled

LOW CABINET



- Equipped with 2 adjustable shelves
- 3 storage levels.
- Max load per level: 100 kg
- Rotating handle with lock on the right door.
- Single color: Pearl gray (baked epoxy paint)

Ref.	HB38	HB38-M	HB61	HB61-M
Supplied	Disassembled	Assembled	Disassembled	Assembled
Lenght (mm)	900	900	1100	1100
Height (mm)	900	900	1000	1000
Width (mm)	450	450	600	600
Weight (kg)	43	43	61	61

TRANSPARENT DOOR CABINETS



ref. HBV58
supplied disassembled

ref. HBV58-M
supplied assembled

- **Width 900mm - Height 1800mm - Depth: 450mm**
- Transparency by 3mm acrylic
- Equipped with 4 shelves adjustable in height forming 5 storage levels.
- Max load per level: 150 kg
- Rotating handle with lock on the right door.
- Single color: Pearl gray (epoxy paint baked in the oven)
- Empty weight: 84kg



ref. HBV69
supplied disassembled

ref. HBV69-M
supplied assembled

- **Width 1100mm - Height 1800mm - Depth: 600mm**
- Transparency by 3mm acrylic
- Equipped with 4 shelves adjustable in height forming 5 storage levels.
- Max load per level: 150 kg
- Rotating handle with lock on the right door.
- Single color: Pearl gray (epoxy paint baked in the oven)
- Empty weight: 107kg

LOW CABINET WITH BINS



- **Width 900mm - Height 900mm - Depth 450mm**
- 3 shelves load 100kg
- 4 levels
- 16 Bins (HxWxD) 155 x 200 x 320mm (8 per colour)
- Rotating handle with lock on the right door.
- Single colour: Pearl grey (oven-baked epoxy paint)
- Empty weight: 59kg

ref. HAB38BAC supplied disassembled

ref. HAB38BAC-m supplied assembled

TALL CABINET WITH BINS



- **Width 900mm - Height 1800mm - Depth 450mm**
- 7 shelves, load 100kg
- 8 levels
- 32 Bins (hwxwd) 155 x 200 x 320mm (16 per colour)
- Rotating handle with lock on the right door.
- Single colour: Pearl grey (baked epoxy paint)
- Empty weight: 117kg

ref. HAB58BAC supplied disassembled

ref. HAB58BAC-M supplied assembled

DRAWERS CABINETS



- MAIN FEATURES**
- Sturdy drawer cabinets in steel for an intensive use.
 - Furnace-baked epoxy paint : grey housing, pearl grey drawers
 - Dims. W 720mm / D 645mm / H 1000mm
 - Maximum load by drawer : 100 kg
 - Total weight : between 150 and 160 kg according the model
 - Handles with label holder
- DESCRIPTION OF THE DRAWERS**
- Drawers with ball bearing slides.
 - A safety device allows the opening of only one drawer at one time. This device prevents the risk of knocking over on the user.
 - The lock jams all the drawers at one time.
 - All the drawers are delivered already equipped.
 - Inside dims. of a drawer: 630 x 450mm

Ref.	AAG-70	AAG-80	AAG-90
Ref. versions on wheels	AAG-70R	AAG-80R	AAG-90R
Poids	133kg	136kg	157kg
Drawer 75mm	2	/	2
Drawer 100mm	4	7	6
Drawer 150mm	1	/	1
Drawer 200mm	1	1	/

STANDARD DRAWER EQUIPMENT	
Drawer H75 mm	28 plastic boxes among 3 sizes 16 boxes 75 x 75mm + 8 boxes 75 x 150mm + 4 boxes 150 x 150mm
Drawer H100 mm	4 metallic storages including - 20 removable dividers
Drawer H150 mm	4 metallic storages including - 20 removable dividers
Drawer H200 mm	4 metallic storages including - 16 removable dividers



metallic storage + dividers layout



plastic boxes layout

ADJUSTABLE CHAIRS AND STOOLS (SILENT)



ref. C5BAR
with footrest



ref. C5BSR
without footrest



ref. TAB5
with footrest



ref. TAB6
without footrest

5-pronged swivel stools and chairs for workbenches. Beech seat.
Swivels, height can be adjusted by using a pneumatic gas lift.
Dimensions: 390 x 380mm (chairs) - Ø340mm (stools)
Seat height from 470 to 670mm maxi. Footprint: Ø680mm including pads.




ref. C5-PRO
with footrest

5-pronged swivel chair covered in black vinyl.
Height adjustable by using the pneumatic gas lift.
Padded seat and back, seat 430 x 390mm.
Height adjustable from 470 to 670mm
Footprint: Ø680mm including pads.



ref. C5-POL
with footrest

5-pronged comfortable chair in polyurethane.
Height adjustable by using the pneumatic gas lift.
Seat and back in compact foam, seat 470 x 440mm.
Height adjustable from 470mm to 670mm
Footprint: Ø680mm including pads.

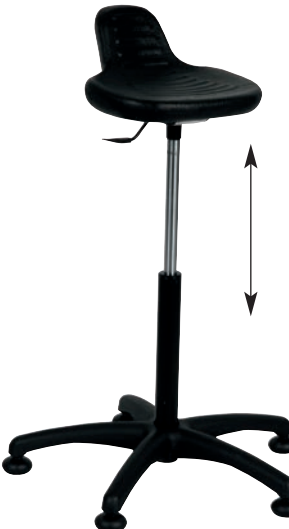

ref. ASS-D
without footrest

Ergonomic polyurethane sit-stand chair.
Height adjustable by using the pneumatic gas lift.
Seat 360 x 250mm.
Height adjustable from 620 to 870mm
Footprint: Ø680mm including pads.

Stool on pad with footrest.
Set height of 590mm.
Wood square seat of 300x300mm.
Footprint: 480 x 480mm.

ref. TAB2



Stool on pad with footrest.
Set height of 590mm.
Wood round seat of Ø300mm.
Footprint: 370 x 370mm.

ref. TAB3



FIXED CHAIRS & STOOLS

Chair on pad with footrest.
Set height of 590mm.
Wood square seat of 350 x 380mm.
Footprint: 420 x 560mm.

ref. C4-BAR

Chair on pad without footrest.
Set height of 500mm.
Wood square seat of 380 x 400mm.
Footprint: 370 x 510mm.

ref. C4-BSR





www.langlois-france.com

info@langlois-france.com - Tél. : 0033 556 75 13 33

Z.I. du haut-vigneau 33174 Gradignan cedex